



- Soft Stone
- SPC Floor
- WPC Wall Panel
- UV Marble Sheet



01

Soft Stone

11

SPC Floor

17

WPC Wall Panel


19

UV Marble Sheet

SOFT STONE

Flexible, Durable & Stylish –

Soft Stone Panels for a Naturally Elegant Wall Perfect for interior and exterior decoration, waterproof, moisture-resistant, easy to install, and eco-friendly!

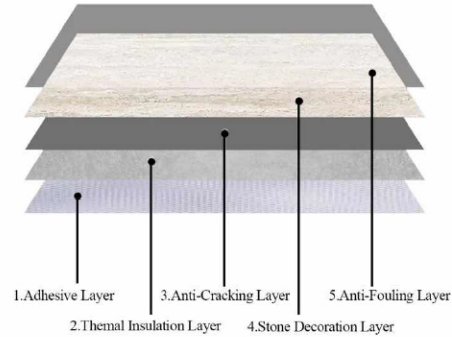

Thickness: 2-4mm

Size: 1200*2400-12~14kg/pc


Size: 600*1200-2.5~3.5kg/pc

Size: 1200*3000-14~16kg/pc




Hot Selling Styles

Travertine Style

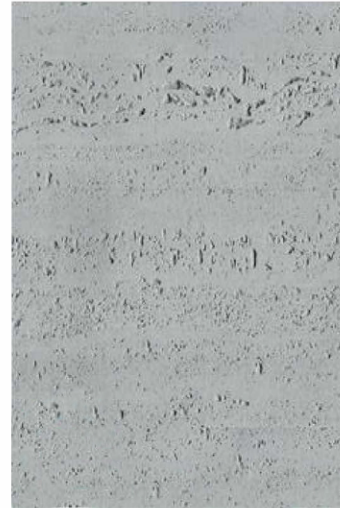


Travertine Print Style

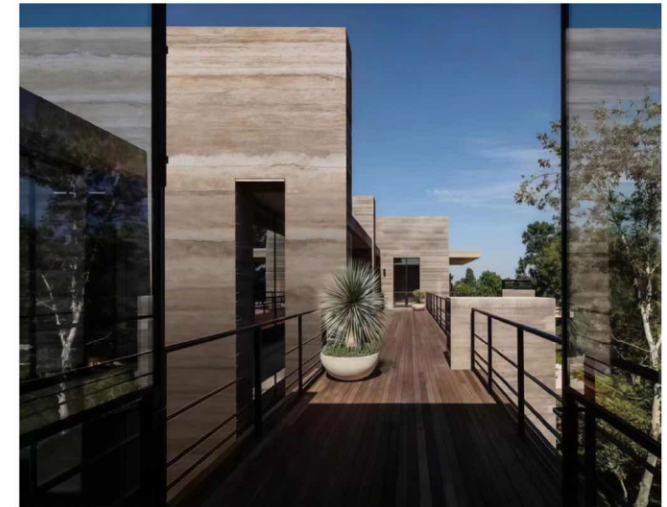


Hot Selling Styles

Slate Style

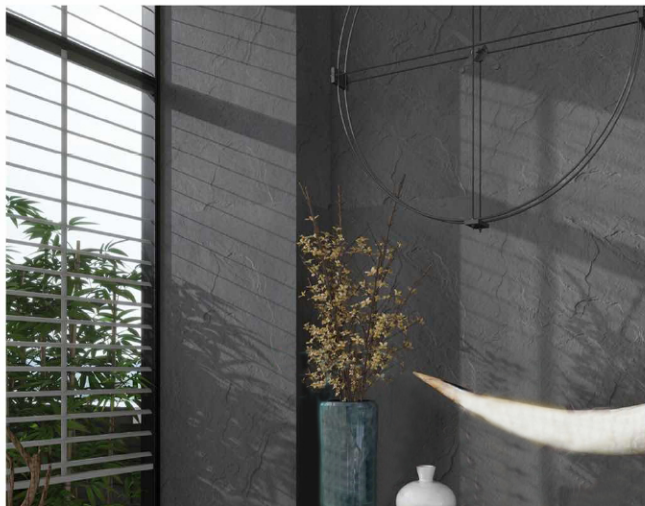


Hot Selling Styles

Dacite Style

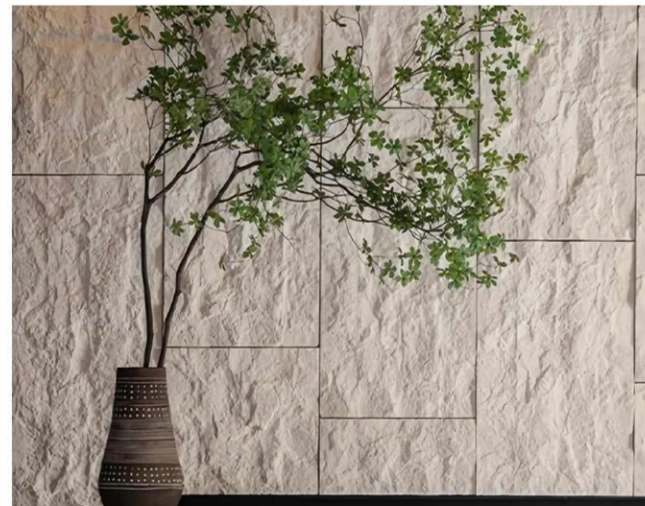

Rammed Earth Board Style

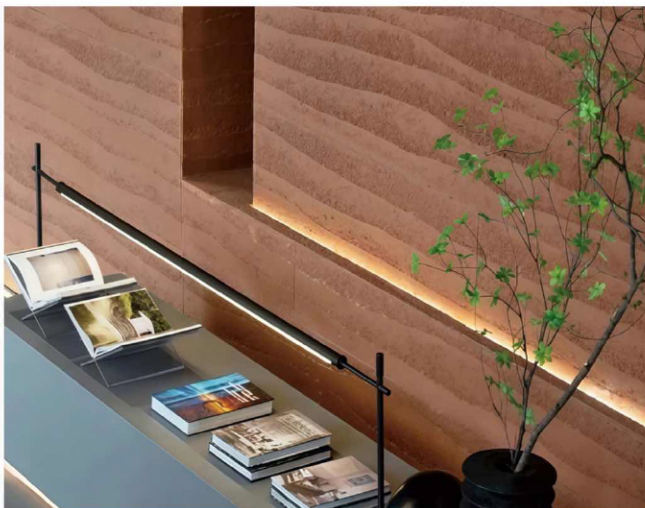


New Line Stone Style



Hot Selling Styles

Fine Fabric Texture Style

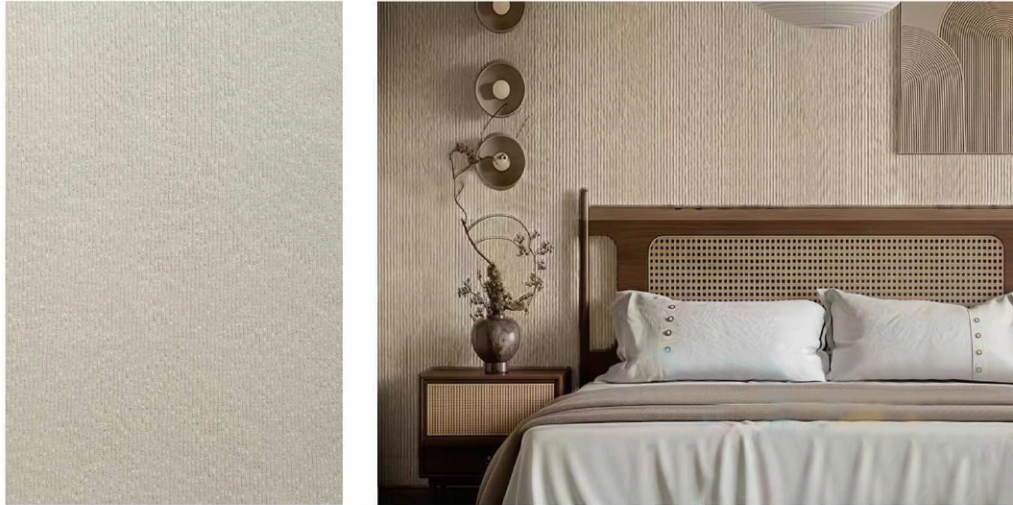


Hot Selling Styles


Starry Stone Style



Coarse Fabric Texture Style

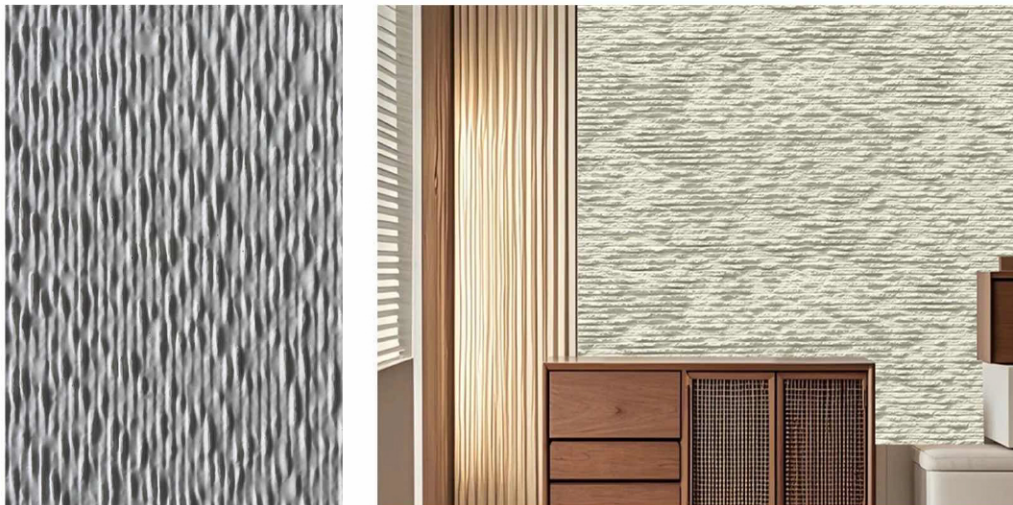


Linen Weave Style


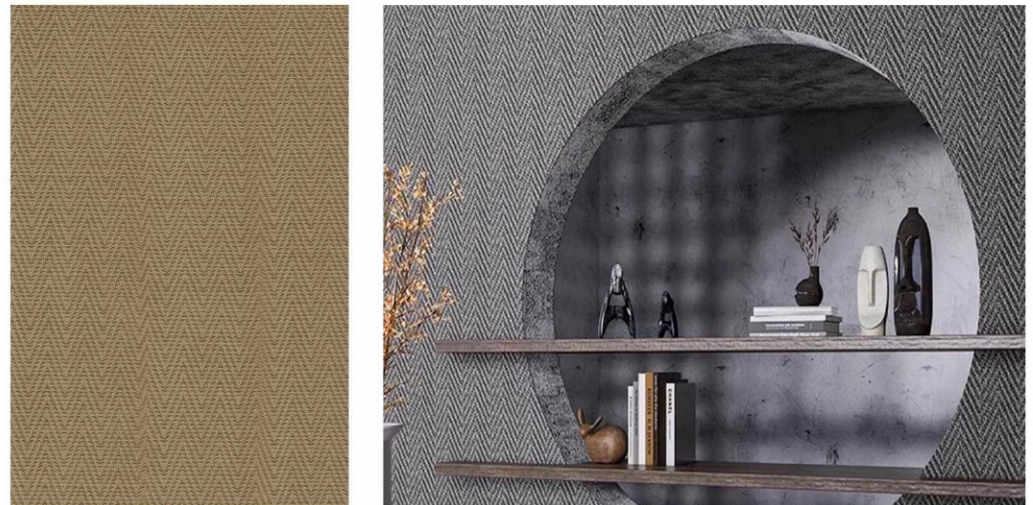


Hot Selling Styles

Saw-Cut Wood Style

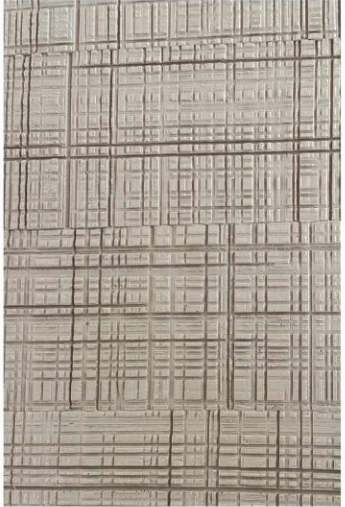


Brick Motif Style

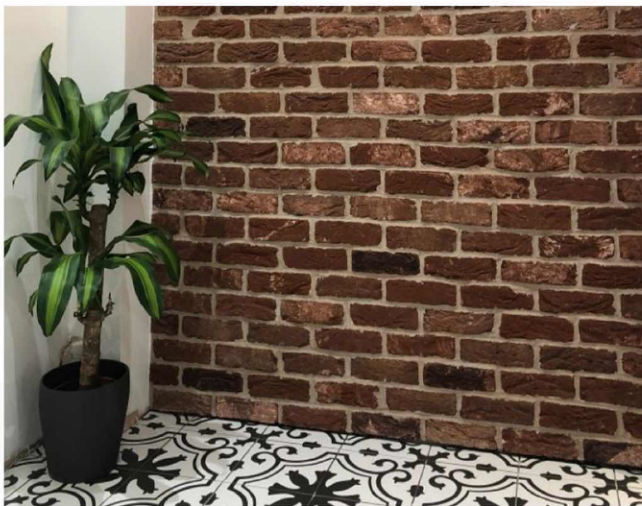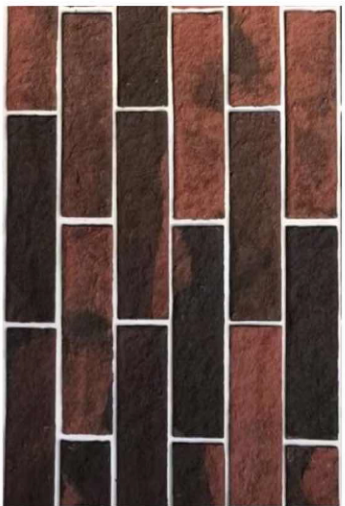


Hot Selling Styles

Vein Stone Style

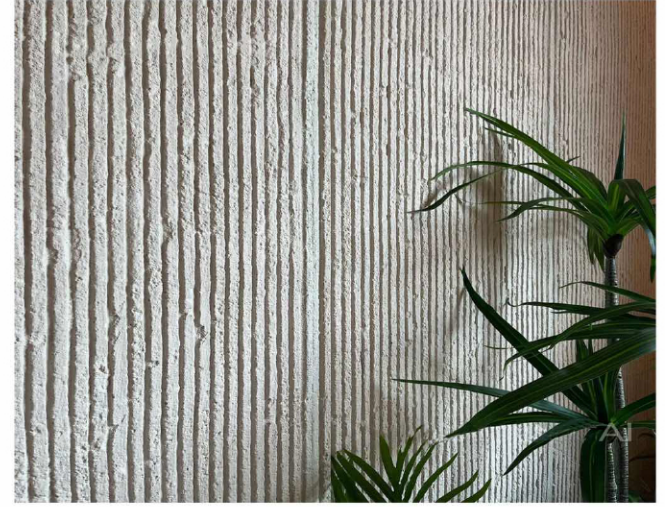

Axed Stone Style

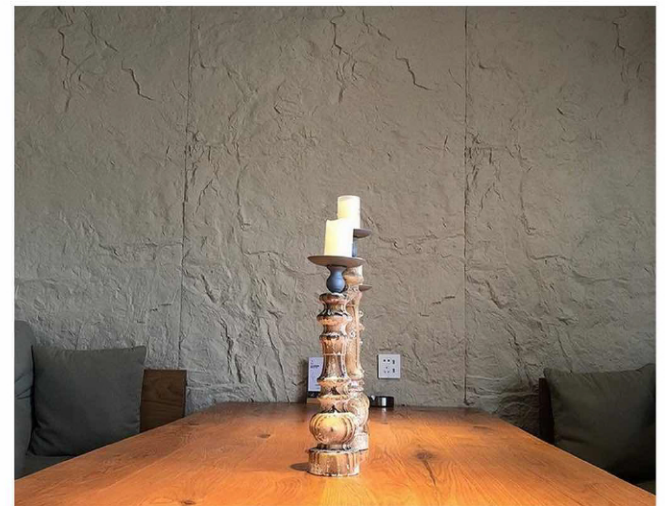

Color Series

A diverse color palette precisely tailors to your every space.

Home decorating is about more than simply choosing a beautiful color; it's about letting color become the connection between space functionality and lifestyle preferences.

Your life, we create!


Pure color



Natural colored sand



Customized Designs

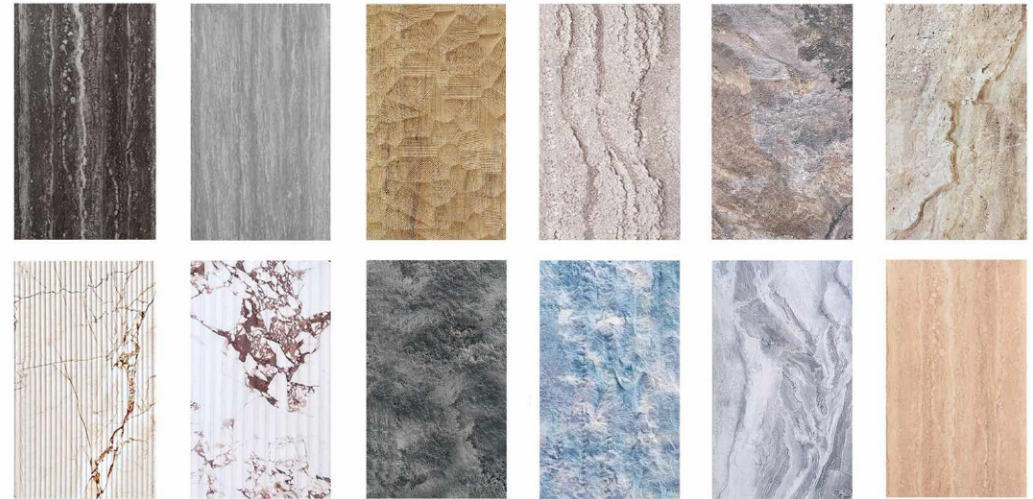

Installation



Mark the positioning lines.



Apply adhesive mortar on the wall surface.



Apply adhesive mortar on the back of the tile.



Move the tile up and down to adjust the joint width, then press firmly with a rubber board.



Fill the joints with grout using a plastic rod bag, or apply silicone sealant.



When the grout is half dry, smooth the seams with a jointing tool.




Remove excess adhesive or grout from the surface with a putty knife.



Wipe off remaining dust and residue with a sponge.

SPC FLOOR

SPC FLOORING(Stone Plastic Composite)is eco-friendly options developed with advanced technology. They offer numerous benefits such as zero formaldehyde, moisture resistance, fire and insect resistance, and easy installation.

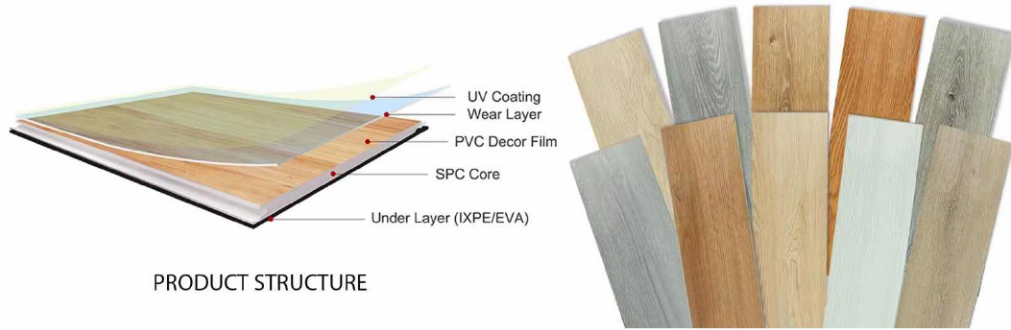

PRODUCT STRUCTURE

Item No. B185



Thickness : 4-8mm
Wear Layer : 0.3-0.7mm

Width: 183/230mm
Length: 1220/1530mm



Item No. B186



Thickness : 4-8mm
Wear Layer : 0.3-0.7mm

Width: 183/230mm
Length: 1220/1530mm



Hot Seiling Colors

Item No. B183



Thickness : 4-8mm
Wear Layer : 0.3-0.7mm

Width: 183/230mm
Length: 1220/1530mm



Item No. B184



Thickness : 4-8mm
Wear Layer : 0.3-0.7mm

Width: 183/230mm
Length: 1220/1530mm



Item No. B187



Thickness : 4-8mm
Wear Layer : 0.3-0.7mm

Width: 183/230mm
Length: 1220/1530mm



Item No. B188



Thickness : 4-8mm
Wear Layer : 0.3-0.7mm

Width: 183/230mm
Length: 1220/1530mm



Item No. B189



Thickness : 4-8mm
Wear Layer : 0.3-0.7mm

Width: 183/230mm
Length: 1220/1530mm



Item No. B190



Thickness : 4-8mm
Wear Layer : 0.3-0.7mm

Width: 183/230mm
Length: 1220/1530mm



Item No. B193



Thickness : 4-8mm
Wear Layer : 0.3-0.7mm

Width: 183/230mm
Length: 1220/1530mm



Item No. B194



Thickness : 4-8mm
Wear Layer : 0.3-0.7mm

Width: 183/230mm
Length: 1220/1530mm



Item No. B191



Thickness : 4-8mm
Wear Layer : 0.3-0.7mm

Width: 183/230mm
Length: 1220/1530mm



Item No. B192



Thickness : 4-8mm
Wear Layer : 0.3-0.7mm

Width: 183/230mm
Length: 1220/1530mm



Item No. B195



Thickness : 4-8mm
Wear Layer : 0.3-0.7mm

Width: 183/230mm
Length: 1220/1530mm



Item No. B196




Thickness : 4-8mm
Wear Layer : 0.3-0.7mm

Width: 183/230mm
Length: 1220/1530mm



Accessories

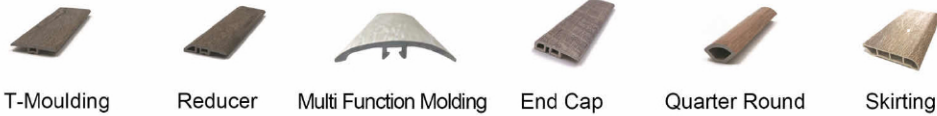

T-Moulding

Reducer

Multi Function Molding

End Cap

Quarter Round

Skirting


Applicable Scenarios

Preparing the floor: For best results, installation must be performed on a stable, flat, dry and dust-free clean surface. Subfloor flatness tolerance is 1/4 in over 10 ft and should not slope more than 1 per 6 in any direction. Cabinetry should be installed first, then the flooring.


1. Flat concrete floors




2. Marble surfaces

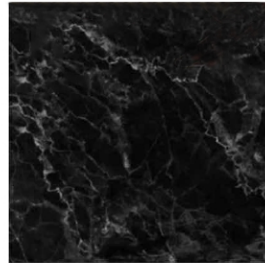



3. Wooden floors

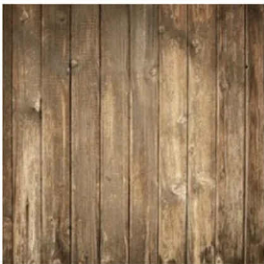


4. Tile surfaces

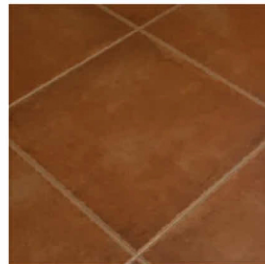


Installation

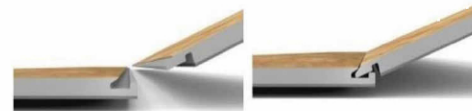

Planks should be stored horizontally in a dry area away from direct sunlight. Do not leave next to heat or cooling ducts. Start installation in a corner of the room, with tongue facing the wall, working from left to right. Leave an expansion gap of $\frac{1}{4}$ in (6mm) around room perimeter and vertical objects




When laying the first row, click the short side of the plank into the previous one and press it by hand, Then use a soft faced hammer and tap to lock completely. Continue to complete the starter row maintaining a straight edge for the following row. When laying the second row, insert the tongue into the groove on the long edge, holding the back edge slightly up.

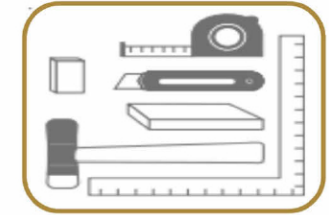


Recommended tools

for installation:

1. Tape measure
2. Square
3. Utility knife
4. Tapping block
5. Soft faced hammer
6. $\frac{1}{4}$ in spacers




Slide the plank up to the short end of the previous plank.




Then drop and lock. Use a soft faced hammer on the short end to ensure a complete lock. Use a tapping block and soft faced hammer on long ends.




WPC WALL PANEL

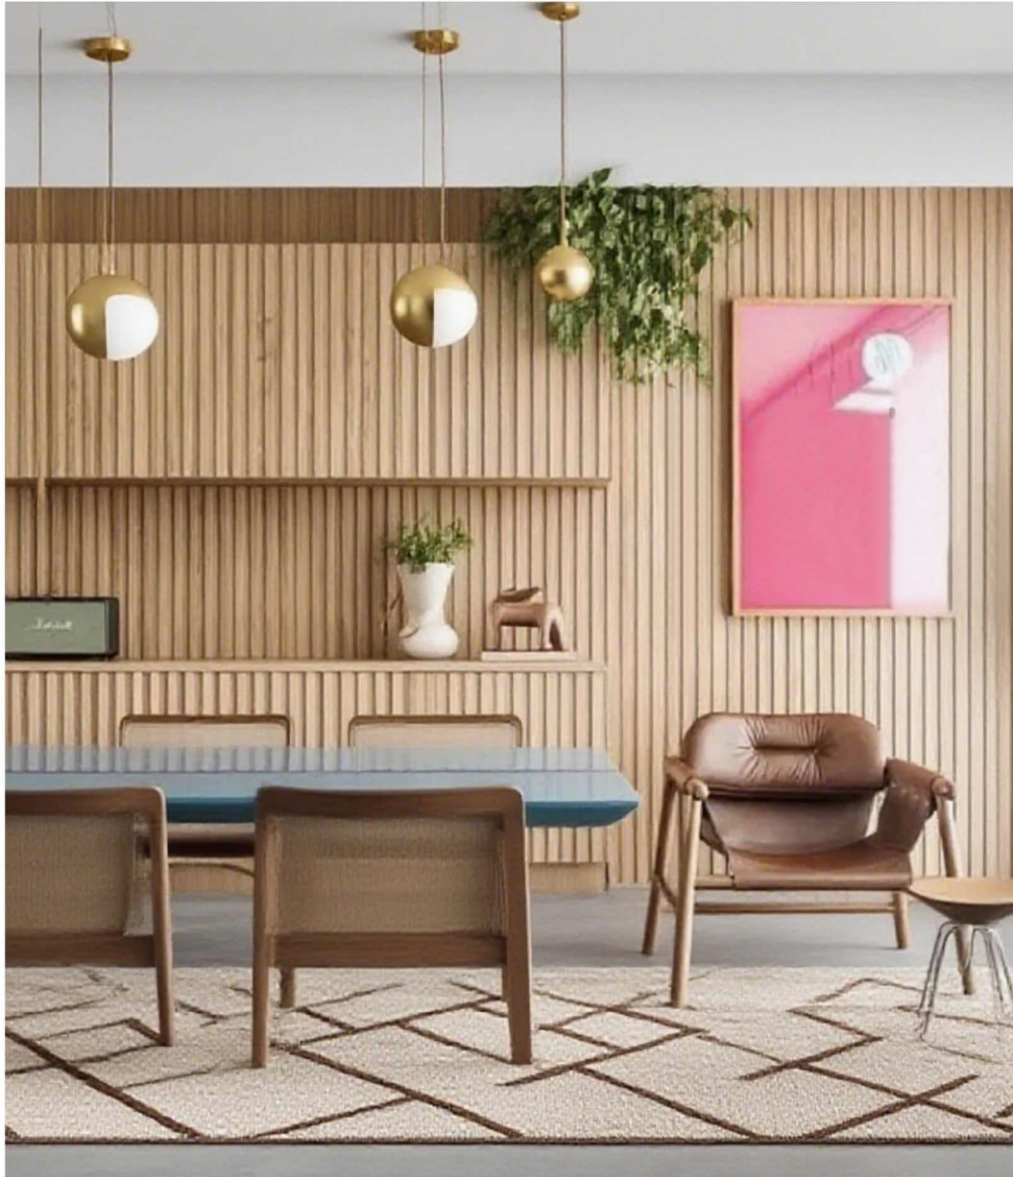

168*23



153*17



155*9




169*17




200*12



155*9



158*15




220*13



150*8



214*9



UV MARBLE SHEET




Specification

Width(Ancho): 1220mm Length(Largo): 2440mm/2800mm

Thickness(Espesor): 2.0mm - 4.0mm


Accessories

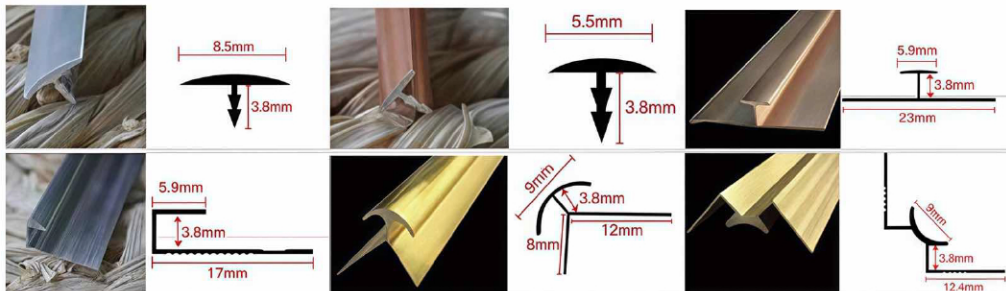


Series



Ordinary

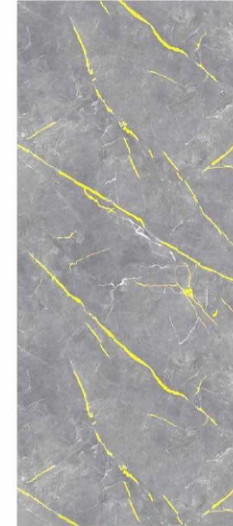

Laser

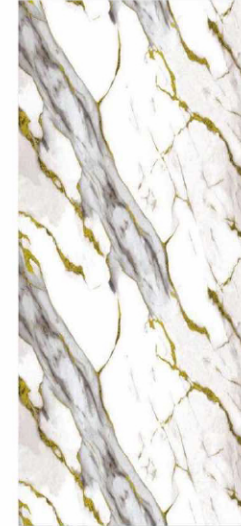

Gilded



Luxury Stone



Embossed



Embossed



3D Printing