



NATURE RIGID CORE SPC FLOORING

Transform Your Space with Nature's Touch

COLLECTION 2026

WHAT IS **RIGID CORE** SPC FLOORING

PRECUILIARITY

Our SPC vinyl click flooring is 100% waterproof and with the high resistance to scratch surface treatment named "Diamond Core".

SPC stands for Stone Polymer Composite, it is water proof and suitable with underfloor heating systems.

It offers a real wood look and it's quiet and make people feel more comfort when under foot.

SPC connected by an extremely stable click system, then to make install work quicker and easier to DIY'er.

All materials are ECO friendly without any heavy metal, it's safe to kids and pets.



CONTENTS



TP-1002

– HORIZON	08
– HERRINGBONE	32
– CHEVRON	38
– STONE	48
– OEM	58
– TECHNICAL	62

NATURE RIGID CORE SPC FLOORING

HORIZON



HORIZON

Nature series combine all range of size and specification of Classic Wood, Herringbone SPC, Chevron SPC, Classic Stone flooring.

URBAN	12
GRAVEN	14
ROYAL	18

VINYL FLOORING EXPERT

TRIOFLOR HORIZON

VINYL FLOORING EXPERT

Nature series combine all range of size and specification of Classic Wood in different size.

Nature collection combines classic specifications and popular pattern, as well as innovative installation and styling, so that you can select your customized proprietary product portfolio.

FEATURES BENEFITS



Total Thickness



Valinge Click



Anti Slip-R9



Pet-Free



Wear Layer



Underlayment for acoustic isolation



Bevelled Edge



Suitable for babies



POPULAR COLORS
RIGID CORE SPC FLOORING

URBAN



TP-1009

PARAMETERS



Subway



Valinge Click

Wear layer

0.3mm

Lock system

Valinge 2G-2G

Overall thickness

5mm (4+1.0mm)XPE

Size

180 × 1230mm



TP-1007

URBAN AVAILABLE DECORS

RIGID CORE FLOORING



TP-1007



TP-1002



TP-1005



TP-1009



TP-1001



TP-1006

URBAN AVAILABLE DECORS

RIGID CORE FLOORING




TP-1006



TP-1004



TP-1008

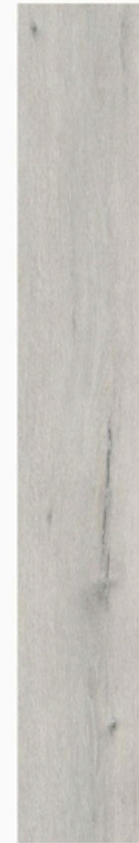

TP-1003



TP-1010

GRAVEN



TD-2101

PARAMETERS



Subway



Valinge Click



EIR

Wear layer

0.5mm

Lock system

Valinge 2G-2G

Overall thickness

6.5mm (5+1.5mm)XPE

Size

228 × 1524mm

Embossing

EIR Embossing



TD-2102

GRAVEN AVAILABLE DECORS

RIGID CORE FLOORING



TD-2102



TD-2107



TD-2105



TD-2104



GRAVEN AVAILABLE DECORS

RIGID CORE FLOORING



TD-2106



TD-2101



TD-2108



TD-2103

ROAL



TC-3213



TC-3214



228 x 1840 mm
9" x 72,4"

READY STOCK

PARAMETERS



Anti Slip-R9



Total Thickness (mm)



Pet-Free



Valinge 2G-5Gi



Waterproof



Bevelled Edge



Wear Layer



Underlayment for acoustic isolation



Coordinated Steps



Skirtings & Profiles




TC-3206

ROAL AVAILABLE DECORS

RIGID CORE FLOORING



TC-3206

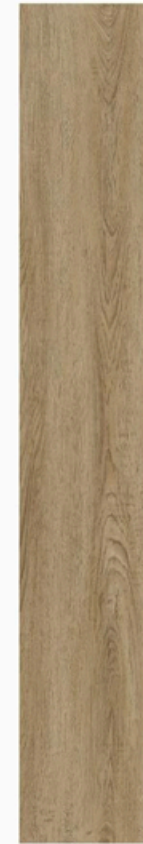

TC-3202



TC-3203



TC-3204



TC-3211

ROAL AVAILABLE DECORS

RIGID CORE FLOORING



TC-3211



TC-3210



TC-3209



TC-3212




TC-3205

ROAL AVAILABLE DECORS


RIGID CORE FLOORING



TC-3205

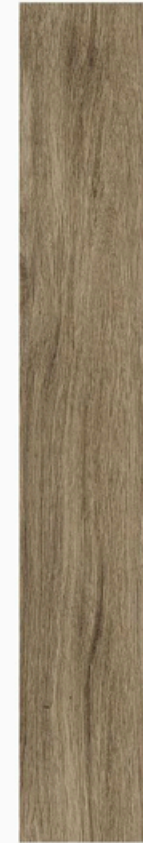

TC-3201

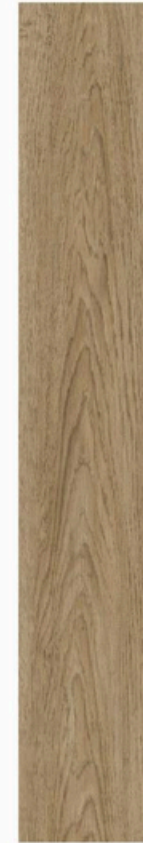

TC-3207



TC-3208

NATURE RIGID CORE
SPC FLOORING

HERRINGBONE



HERRINGBONE

Herringbone SPC can be install easily click together
in an A and B format Valinge click system.

VINYL FLOORING EXPERT

Herringbone SPC can be install easily click together in an A and B format Valinge click system, so they can laid in the popular herringbone style, It can be easily installed even without a professional installer.

A variety of sizes and lengths of herringbone SPC are available to make the installation effect present a variety of rich visual aesthetics. The 90-degree assembly effect infinite extension expands your visual space.

FEATURES BENEFITS



Overall Thickness



Valinge Click



Anti Slip-R9



Waterproof



Wear Layer



Suitable for babies



Bevelled Edge



Underlayment for acoustic isolation



POPULAR COLORS

RIGID CORE SPC FLOORING

HERRINGBONE



TR-4301

PARAMETERS

Wear layer 0.3mm	Lock system Valinge 2G-5Gi	Overall thickness 5mm (4.0+1.0mmIXPE)	Size 125×625mm
Wear layer 0.5mm	Lock system Valinge 2G-5Gi	Overall thickness 7.5mm (6.0+1.5mmIXPE)	Size 127×635mm

HERRINGBONE AVAILABLE DECORS

RIGID CORE FLOORING



TR-4301



TR-4302



TR-4303

NATURE RIGID CORE SPC FLOORING



Chevron SPC is the future star of the Bright series. The 45 degree angle design and assembly method make this series of products one of the first manufacturers to achieve true chevron click install.

VINYL FLOORING EXPERT

Chevron SPC is the future star of the Nature series. The 45 degree Angle design and assembly method make this series of products one of the first manufacturers to achieve true chevron click install.

Painted V groove is more detailed to perfect the four sides of the floor, so that the floor is more close to nature and has a three-dimensional design.

The hardened back layer makes your daily work and life more comfortable and quiet.

FEATURES BENEFITS



Overall Thickness



Valinge Click
2G-5Gi



Anti Slip-R9



Waterproof



Wear Layer



Suitable for
babies



V-groove painted



EIR



POPULAR COLORS
RIGID CORE SPC FLOORING

CHEVRON



PARAMETERS

Wear layer

0.5mm

Lock system

Valinge 2G-5Gi

Overall thickness

7.0mm (6.0+1.0mmIXPE)

Density of IXPE

130kg/m³

Size

127×600mm

Angle

45° (Angle can be adjusted from 45°-60°)

Embossing

EIR Embossing

Bevel

V-groove painted

TY-5405




TY-5401

CHEVRON AVAILABLE DECORS

RIGID CORE FLOORING



TY-5401

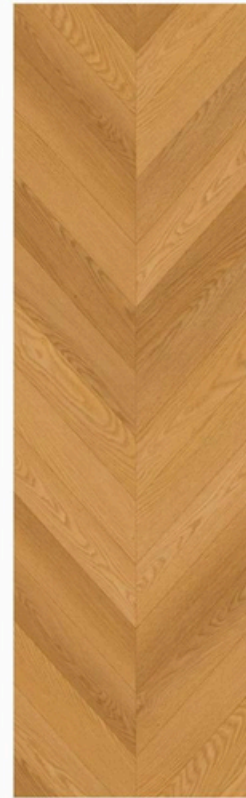

TY-5402



TY-5403



TY-5406

CHEVRON AVAILABLE DECORS

RIGID CORE FLOORING



TY-5406



TY-5405



TY-5404

NATURE RIGID CORE

SPC FLOORING



Stone SPC flooring provides users who like marble and tile with one more choice, comfortable foot feel and non-slip coefficient enrich the customer experience.

VINYL FLOORING EXPERT

Stone SPC flooring provides users who like marble and tile with one more choice, comfortable foot feel and non-slip coefficient enrich the customer experience.

offers five different floor specification to make the installation more atmospheric and close to nature, meet the design ideas of different interior styles.

The large stone pattern sets the tone of the interior design and greatly improves the texture of the overall space.

FEATURES BENEFITS



Overall Thickness



Valinge Click



Anti Slip-R9



Waterproof



Wear Layer



Suitable for babies



Bevelled Edge



Underlayment for acoustic isolation



POPULAR COLORS
RIGID CORE SPC FLOORING

STONE



TS-6502

PARAMETERS 1

Wear layer	Lock system	Overall thickness	Size
0.3mm	Vallinge 2G-2G	6mm (5.0+1.0mmIXPE)	303×606mm

STONE AVAILABLE DECORS

RIGID CORE FLOORING



TS-6502



TS-6501



TS-6503

PARAMETERS 2

Wear layer

0.3mm

Lock system

Vallinge 2G-2G

Overall thickness

6.5mm (5.5+1.0mmIXPE)

Size

475×900mm

400×800mm

600×900mm

600×1200mm

STONE AVAILABLE DECORS

RIGID CORE FLOORING



TS-6503




TS-6504



TS-6505

**FOR MORE PRODUCT
SPECIFICATIONS
PLEASE CONSULT THE SALES**

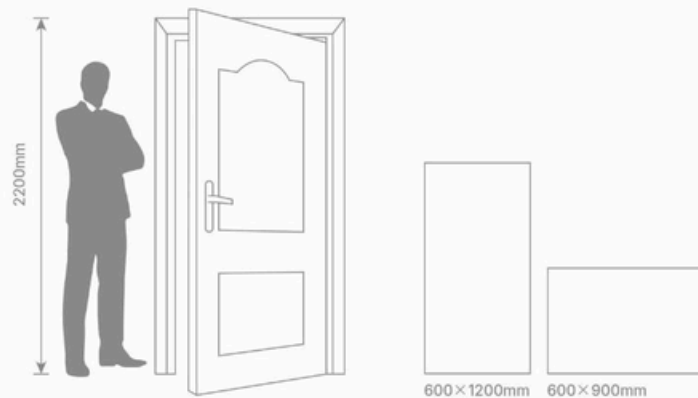

NATURE RIGID CORE SPC FLOORING

OEM



OEM


We have many years of experience in product research and development, with a complete production chain, which help us to provide you with a full range of personalized customized services, that make your products different in the market.

VINYL FLOORING EXPERT

IF THE ABOVE PRODUCTS DO NOT MEET YOUR NEEDS WE ALSO PROVIDE CUSTOMIZED SERVICES

We have many years of experience in product research and development, with a complete production chain, which help us to provide you with a full range of personalized customized services, that make your products different in the market.

Besides, provides you with a full range of personalized customized service on specification and pattern, always keep your products unique stand out in the market.

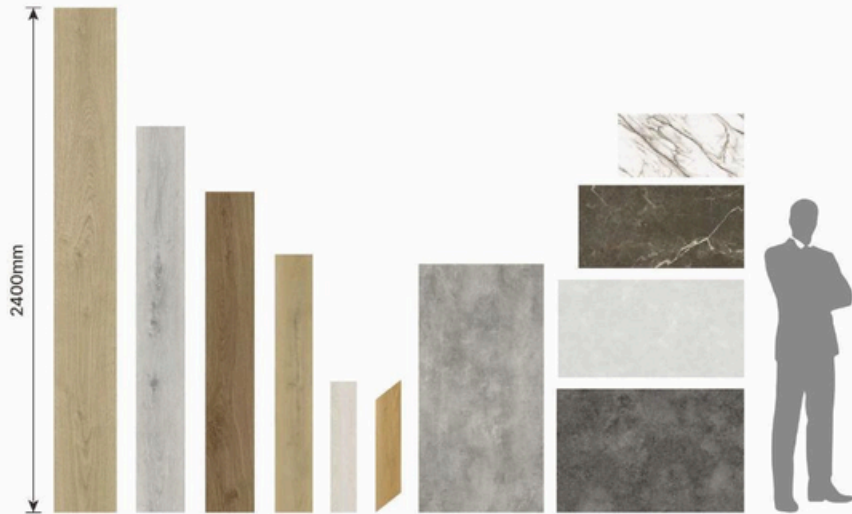

WHAT CAN WE CUSTOMIZE?



Embossing



Size



Thickness



Design



Angle
customization



Underlayment for
acoustic isolation

NATURE RIGID CORE SPC FLOORING

TECHNICAL



TECHNICAL

PRODUCT INFORMATION | REFERENCE | NORMS | RESULT

VINYL FLOORING EXPERT



PRODUCT INFORMATION		
Material	100% virgin PVC+Calcium calcite powder Plank Size(mm)	
Plank Size(mm)	183x1220mm/230x1500mm/231x1524mm/231x1800mm/228x2400mm 235x625mm/127x635mm 303x606mm/400x800mm/475x900mm/600x900mm/600x1200mm	
Finish	UV Coating	
Emboss	Wood embossing/ EIR embossing	
Installation	Click system	
Locking System	Valinge 2G-2G/ Valinge 2G-5G/ Valinge 2G-5Gi	
Bevel	Four-side bevel/V-groove painted	
Floor heating installation	suitable for underfloor water heating	
REFERENCE	NORMS	RESULT
Tolerance of Length	EN ISO 24342	Avg ± 0.2mm, Max ≤ 0.5mm
Tolerance of Width	EN ISO 24342	Avg ± 0.1mm, Max ≤ 0.2mm
Tolerance on the squareness	EN ISO 24342	side length ≤ 400mm, squareness ≤ 0.25mm side length > 400mm, squareness ≤ 0.35mm
Thickness	EN ISO 24346	3.2-8mm (+/- 0.1mm)
Wear Layer Thickness	EN ISO 24340	0.1-0.7mm (+/- 0.05mm)
Determination of stability	EN ISO 23999	≤ 0.15%
Curling resultant to heat	EN ISO 23999	≤ 1mm
Color fastness	EN ISO 105-B02	6 class
Reaction to Fire	EN 13501-1	Bf1-S1
Castor Chair Resistance	EN 425	Pass
Peeling strength of layer	EN 431	> = 95N/5cm
Locking strength	SO 24334	Long-side: > = 150N/5cm Short-side: > = 150N/5cm
Stain Resistance	EN 423	Not affected
VOC	ISO 16000	VOC A+
Slip Resistance	DIN 51130	Class R9
Residual Indentation	ISO24343-1:2007	≤ 0.1mm
Chemical Products Resistance	EN 423	Pass
Ortho-Phthalates	US EPA 3550c:2007	None
PCP	EN 12673	None
Formaldehyde Emission	EN 717-1	E1