



CATALOGUE

2025-2026

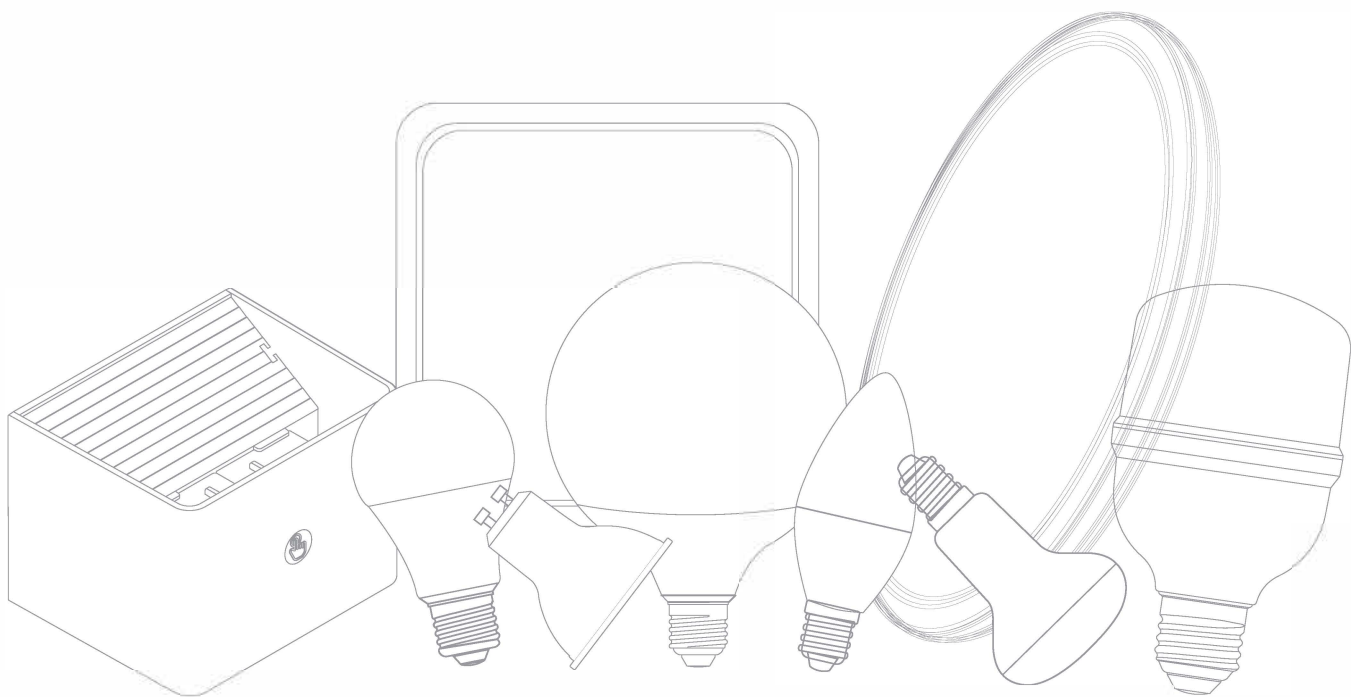

Ceiling Light

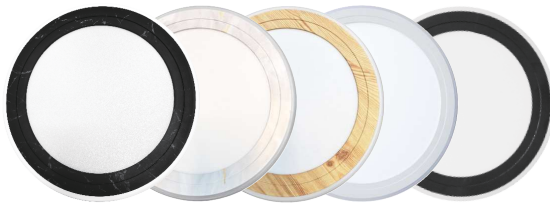

RGB MODE



MODEL	WATT	SIZE(mm)	Color Temperature	LUMEN	ENERG
CLR420-W	32W	Φ420*30	3000K/4000K/6500K	3400	F
CLR420-B	32W	Φ420*30	3000K/4000K/6500K	3400	F
CLR295-W	24W	Φ295*28	3000K/4000K/6500K	2500	F
CLR295-B	24W	Φ295*28	3000K/4000K/6500K	2500	F



SQUARE






WATT	SIZE(mm)	LUMEN	VOLTAGE	ENERG
18W	220*220*25	1850	220-240V	F
21W	295*295*25	2500	220-240V	E
32W	420*420*25	3600	220-240V	E
37W	800*25*31	4000	220-240V	F



ROUND

WATT	SIZE(mm)	LUMEN	VOLTAGE	ENERG
15W	Φ180*25	1800	220-240V	E
18W	Φ220*25	2200	220-240V	E
24W	Φ295*25	3200	220-240V	E
32W	Φ420*25	4000	220-240V	E
50W	Φ500*25	5400	220-240V	E

Function selection

- 01 **SINGLE COLOR** 3000K/4000K/6500K
- 02 **BOTTOM'S CHANGE**  3000K-4000K-6500K
- 03 **CCT+REMOTE CONTROL** 
- 04 **CCT+W/N/D+REMOTE CONTROL**  + 3000K/4000K/6500K BACKLIGHT
- 05 **CCT+RGB+REMOTE CONTROL** 
- 06 **CCT+RGB+CHASING+REMOTE CONTROL** 

Installation method





SQUARE



ROUND



Infrared human body sensing panel light

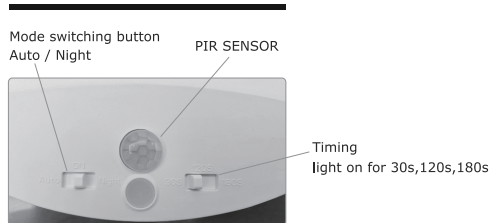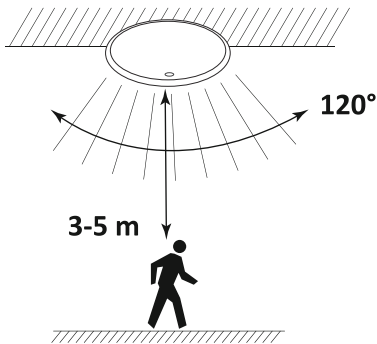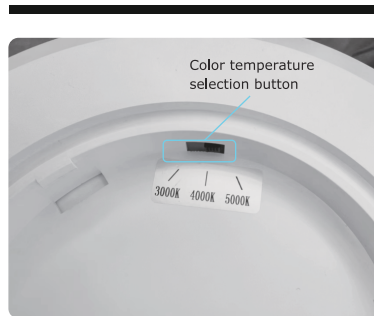

15 000H
 x12500
 CRI≥80
 220-240V 50-60HZ
 IP20

MODEL	WATT	SIZE(mm)	Color Temperature	LUMEN	ENERG
SL-CLR-20S	20W	Φ 220x31	3000/4500/6000K	2100	F

Linkage Control Atmosphere Wall lamp



SL-T097A-W

SL-T097A-BK





SL-T097B-W

SL-T097B-BK




SL-T097C-W

SL-T097C-BK

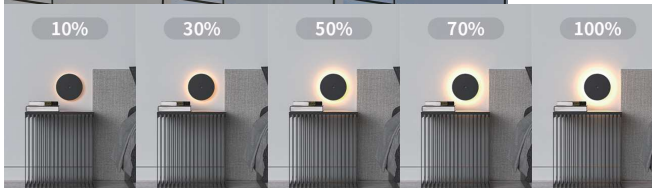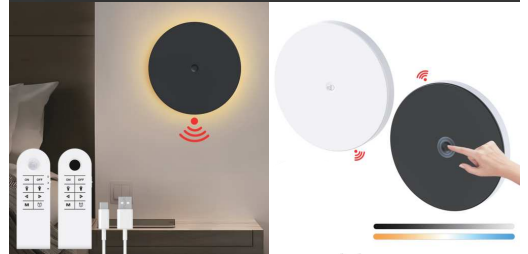


Model No.	SL-T097-3CCT
Power	3W
Battery Capacity	5400mAh
Lumen	250lm
Charge time	6.5H
Working time	12H
CCT	3CCT
Switch	(Toggle+Touch+2.4G)
Installation method	(Magnetic)




Φ 132 mm



25 mm




132 mm



128 mm

25 mm




120 mm



25 mm

Charging touch sensitive ambient wall lamp

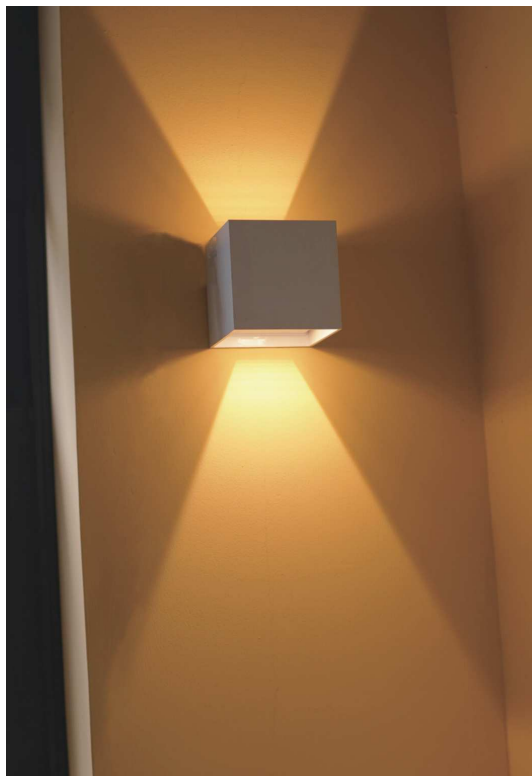

Charging Time: 6.5 Hours




Usage time: 10-12 hours



Switch: Touch+Move

Installation method: Magnetic attraction

Dimensions.

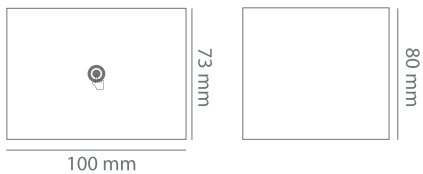

 **15 000H**
 **x12500**
CRI:80
DC5V
IP20


MODEL	WATT	Color Temperature	LUMEN	Battery capacity
LED-WL093-200	2W	3000K-6500K	200	4500mAh

Charging 3-color induction light



SL-T109-W




SL-T109-BK



DC 5V 1 A , 0.8W 40lm
Battery: 500/1000mAh
Switch Mode: (Toggle+Touch)
Installation method: Magnetic

DIMENTION

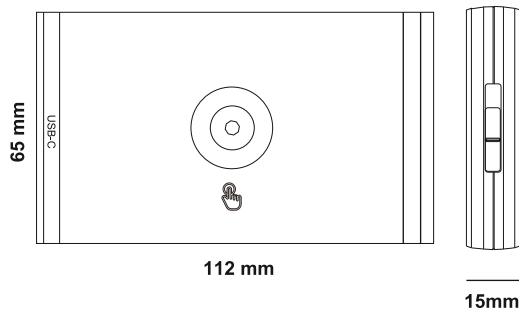

CHARGING



Type-C



2h
charging time




8~12h
working time



Charging universal ambient wall lamp




DC 5V 1 A , 0.5W 45lm
Battery: 1000mAh
Switch Mode: Button+Remote
Installation method: Magnetic

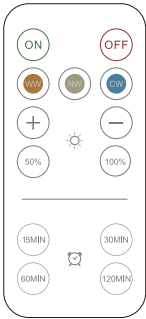


SL-T045B

DIMENTION

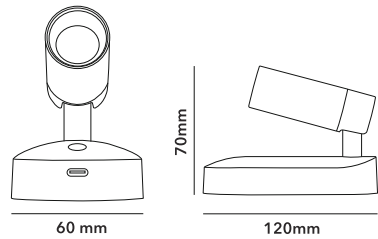

SL-T045

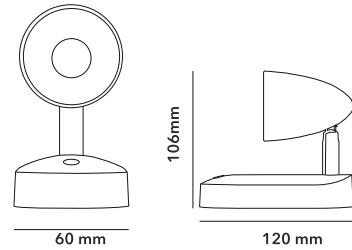

CHARGING



Type-C



2h
charging time



8h
working time

Surface mounted downlight

ECO
PP



RDL



SDL

MODEL	WATT	SIZE(mm)	Color Temperature	LUMEN	ENERG
RDL-SM-6	6W	Φ120*31	3000K/4000K/6500K	510	F
RDL-SM-12	12W	Φ172*31	3000K/4000K/6500K	1400	E
RDL-SM-18	18W	Φ222*31	3000K/4000K/6500K	1850	F
RDL-SM-24	24W	Φ302*31	3000K/4000K/6500K	2500	F
RDL-SM-30	30W	Φ302*31	3000K/4000K/6500K	3160	F
SDL-SM-6	6W	Φ120*31	3000K/4000K/6500K	510	F
SDL-SM-12	12W	Φ172*31	3000K/4000K/6500K	1400	E
SDL-SM-18	18W	Φ222*31	3000K/4000K/6500K	1850	F
SDL-SM-24	24W	Φ222*31	3000K/4000K/6500K	2500	F
SDL-SM-30	30W	Φ302*31	3000K/4000K/6500K	3160	F

Round



2.5' 3W



8' 18&24W

Square



2.5' 3W



8' 18&24W

MODEL	WATT	SIZE(mm)	CUT SIZE(mm)	LUMEN	ENERG
SL-DLC-R3	3W	Φ 90x28	Φ67	300	F
SL-DLC-R6	6W	Φ 117x28	Φ88	600	F
SL-DLC-R9	9W	Φ 147x28	Φ120	900	F
SL-DLC-R12	12W	Φ 167x28	Φ140	1200	F
SL-DLC-R18	18W	Φ 222x28	Φ192	1850	F
SL-DLC-R24	24W	Φ 222x28	Φ192	2500	F
SL-DLC-S3	3W	90x90x28	Φ67	300	F
SL-DLC-S6	6W	117x117x28	Φ88	600	F
SL-DLC-S9	9W	147x147x28	Φ120	900	F
SL-DLC-S12	12W	167x167x28	Φ140	1200	F
SL-DLC-S18	18W	222x222x28	Φ192	1850	F
SL-DLC-S24	24W	222x222x28	Φ192	2500	F



15 000H

ON/OFF
x12500

CRI≥80

220-240V
50-60HZ


IP44



Recessed downlight

CLASSIC

ABS

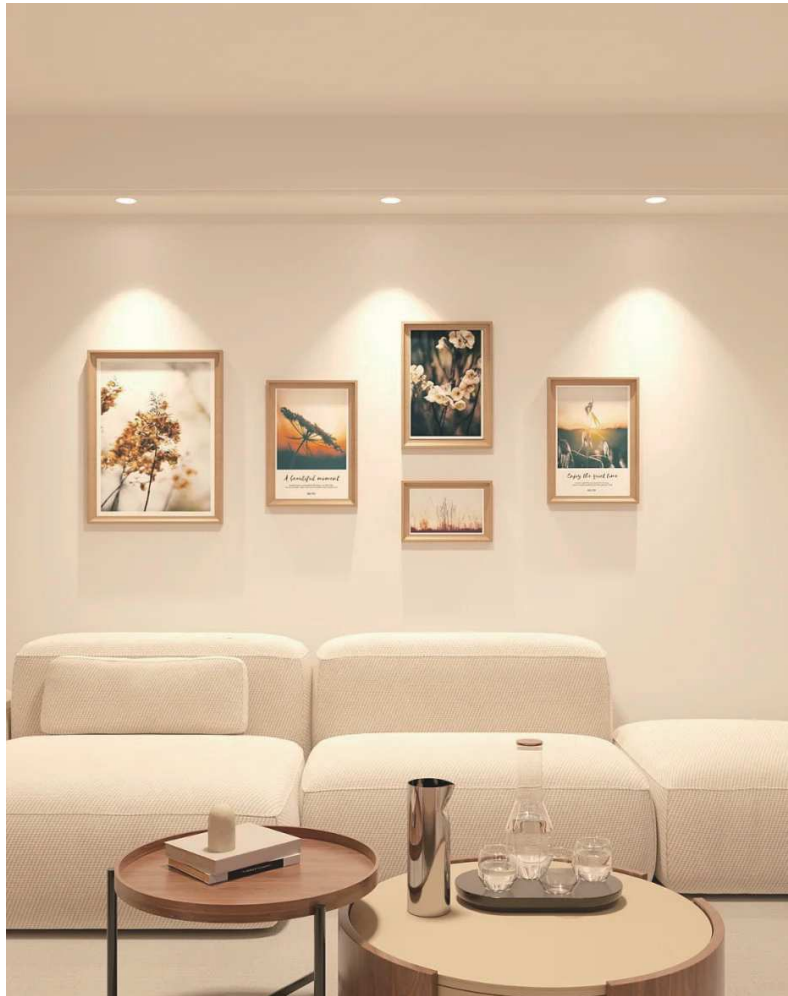

MODEL	WATT	SIZE(mm)	Color Temperature	LUMEN	ENERG
RDL-COB-3	3W	Φ55*34	3000K/4000K/6500K	300	E
RDL-COB-5	5W	Φ75*20	3000K/4000K/6500K	430	F
RDL-COB-7	7W	Φ95*30	3000K/4000K/6500K	620	F
RDL-COB-9	9W	Φ113*34	3000K/4000K/6500K	970	E
RDL-COB-12	12W	Φ135*36	3000K/4000K/6500K	1330	E



15 000H
 x12500
CRI≥80
220-240V
50-60HZ
IP20

Moisture-proof lamp

Oval



SL-MPLO-18/BK



SL-MPLO-12/BK

Round



SL-MPLR-18/BK



SL-MPLR-12/W



MODEL	WATT	SIZE(mm)	Color Temperature	LUMEN	ENERG
SL-MPLR-12	12W	Φ210*58	3000K/4000K/6500K	1460	E
SL-MPLR-18	18W	Φ175*58	3000K/4000K/6500K	2020	E
SL-MPLO-12	12W	224*99*56	3000K/4000K/6500K	1460	E
SL-MPLO-18	18W	194*94*56	3000K/4000K/6500K	2020	E



15 000H

on/off
X12500

CRI≥80

220-240V
50-60HZ

IP64




Emergency Damp-proof lamp

LED(220V)



Dimensions.

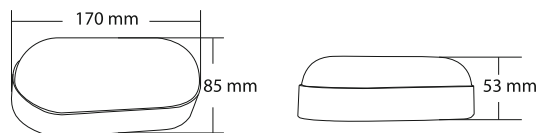

MODEL	WATT	Color Temperature	LUMEN	ENERG	EMERGENCY LUMEN
LED-DPL-14	14W	6500K	1750	E	620lm-330lm-175lm

Emergency Downlight

LED(220V)



D:167mm
H:28mm



CHARGING TIME:6-7 HORAS



3 INTENSIDADES


DC MODE

2H-500lm 4H-200lm 6H-75lm



2000mAh

Li2Mn2O4 Battery



MODEL	Battery capacity	Color Temperature	LUMEN/220V	EMERGENCY LUMEN
LED-DL-6	2000mAh	3000-6400K	1800	500

Emergency Light Bulb

LED(100-240V)



7W

D:60mm
H:120mm



9W

D:65mm
H:134mm



11W

D:70mm
H:150mm




ON/OFF



MODEL	Battery capacity	BASE	Color Temperature	LUMEN/220V	EMERGENCY LUMEN
LED-A60-650	1200mAh	E26/E27	3000-6400K	650	300
LED-A65-850	1200mAh	E26/E27	3000-6400K	850	300
LED-A70-1100	1200mAh	E26/E27	3000-6400K	1100	300

DC 5V Rechargeable atmosphere light bulb

Remote control distance: 4-6M

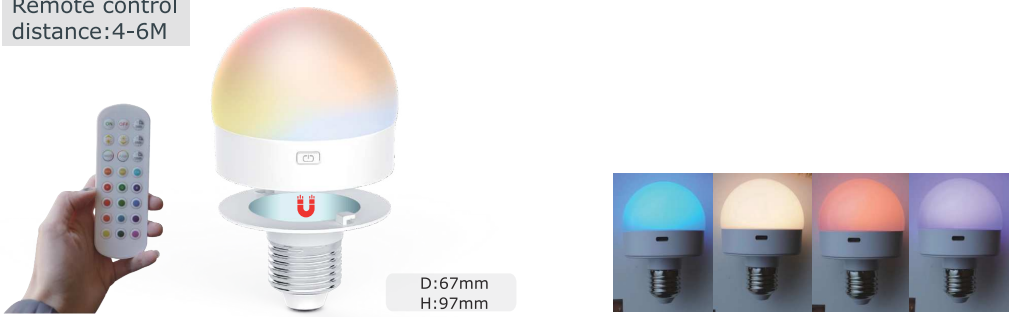

D:67mm
H:97mm

MODEL	WATT	Color Temperature	LUMEN	Battery capacity
LED-G67DC-200	3W	3000K-6500K+RGB	120	1800mAh



Lamp head hook base

D:60mm
H:123mm

Charging Time:3 Hours

Usage time:
100% brightness-8 hours,
50% -15 hours

2000mAh
Li-ion Cell
HYLN-IMR18650 Battery

MODEL	WATT	Color Temperature	LUMEN	Battery capacity
LED-A60DC-200	3W	3000K-6500K	200	2000mAh

DC 5V Emergency Light Bulb



Lamp head hook base

D:65mm
H:133mm

Charging Time:3 Hours

Usage time:
100% brightness-8 hours,
50% -15 hours



2000mAh
Li-ion Cell
HYLN-IMR18650 Battery

MODEL	WATT	Color Temperature	LUMEN	Battery capacity
LED-A65DC-200	3W	3000K-6500K	200	2000mAh

15 000H | x12500 | **CRI:80** | **DC5V**



3 CCT CONTROLLED BY 3 KEYS

LED GU10




MODEL	WATT	Base	Color Temperature	LUMEN	ENERG
LED-GU10-3Way-5	5W	GU10	3000/4000/6500K	430	F
LED-GU10-3Way-7	7W	GU10	3000/4000/6500K	610	F

LED A60




MODEL	WATT	Base	Color Temperature	LUMEN	ENERG
LED-A60-3Way-8	8W	E27	3000/4000/6500K	806	F
LED-A60-3Way-9	9W	E27	3000/4000/6500K	830	F
LED-A60-3Way-10	10W	E27	3000/4000/6500K	950	F
LED-A60-3Way-15	15W	E27	3000/4000/6500K	1490	F

LED C37



MODEL	WATT	Base	Color Temperature	LUMEN	ENERG
LED-C37-3Way-5	5W	E14/E27	3000/4000/6500K	430	F
LED-C37-3Way-6	6W	E14/E27	3000/4000/6500K	510	F
LED-C37-3Way-7	7W	E14/E27	3000/4000/6500K	650	F

LED G45



MODEL	WATT	Base	Color Temperature	LUMEN	ENERG
LED-G45-3Way-5	5W	E14/E27	3000/4000/6500K	430	F
LED-G45-3Way-6	6W	E14/E27	3000/4000/6500K	510	F
LED-G45-3Way-7	7W	E14/E27	3000/4000/6500K	650	F

15 000H | x12500

CRI:80

220-240V
50-60HZ


LUMEN CHANGING&COLOR CHGANGING

LUMEN CHANGING



3-stage dimming

COLOR CHANGING



3 color temperature options



LED GU10

MODEL	WATT	Base	LUMEN	ENERG
LED-GU10LC-5	5W	GU10	430	F
LED-GU10LC-7	7W	GU10	610	F
LED-GU10CC-5	5W	GU10	430	F
LED-GU10CC-7	7W	GU10	610	F



LED A60

MODEL	WATT	Base	LUMEN	ENERG
LED-A60LC-8	8W	E27	806	F
LED-A60LC-9	9W	E27	830	F
LED-A60LC-10	10W	E27	950	F
LED-A60LC-11	11W	E27	1050	F
LED-A60LC-12	12W	E27	1180	F
LED-A60LC-15	15W	E27	1490	F
LED-A60CC-8	8W	E27	806	F
LED-A60CC-9	9W	E27	830	F
LED-A60CC-10	10W	E27	950	F
LED-A60CC-11	11W	E27	1050	F
LED-A60CC-12	12W	E27	1180	F
LED-A60CC-15	15W	E27	1490	F

Ø 37mm



LED C37

MODEL	WATT	Base	LUMEN	ENERG
LED-C37LC-5	5W	E14/E27	410	G
LED-C37LC-6	6W	E14/E27	510	F
LED-C37LC-7	7W	E14/E27	650	F
LED-C37CC-5	5W	E14/E27	410	G
LED-C37CC-6	6W	E14/E27	510	F
LED-C37CC-7	7W	E14/E27	650	F

Ø 45mm



LED G45

MODEL	WATT	Base	LUMEN	ENERG
LED-G45LC-5	5W	E14/E27	410	G
LED-G45LC-6	6W	E14/E27	510	F
LED-G45LC-7	7W	E14/E27	650	F
LED-G45CC-5	5W	E14/E27	410	G
LED-G45CC-6	6W	E14/E27	510	F
LED-G45CC-7	7W	E14/E27	650	F

Ø 125mm



LED G125

MODEL	WATT	Base	LUMEN	ENERG
LED-G125LC-9	9W	E27	830	F
LED-G125LC-12	12W	E27	1180	F
LED-G125LC-15	15W	E27	1490	F
LED-G125CC-9	9W	E27	830	F
LED-G125CC-12	12W	E27	1180	F
LED-G125CC-15	15W	E27	1490	F

15 000H

ON OFF
x12500

CRI≥80

220-240V
50-60Hz

SMD BULB



3W/4.9W/6.3W
D:37mm
H:99mm



7W
D:37mm
H:106mm



7W
D:37mm
H:130mm



3W/4.9W/6.3W
D:45mm
H:80mm



7W
D:45mm
H:89mm



15 000H

x12500


CRI:80

220-240V
50-60HZ

MODEL	WATT	BASE	LUMEN	Voltage	ENERG
① C37/G45/F40	3W	E14/E27	250	220-240V	G
② C37/G45/F40	4.9W	E14/E27	410	220-240V	G
③ C37/G45/F40	6.3W	E14/E27	560	220-240V	F
④ C37/G45/F40	7W	E14/E27	650	220-240V	F



15 000H
 x12500
CRI:80 **220-240V**
50-60HZ

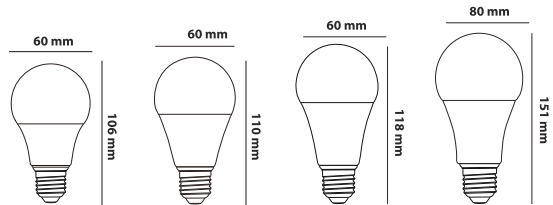

MODEL	WATT	BASE	LUMEN	Voltage	ENERG
① LED-A60-6	6W	E27	510	220-240V	F
② LED-A60-8	8W	E27	720	220-240V	F
③ LED-A60-9	9W	E27	830	220-240V	F
④ LED-A60-11	11W	E27	1050	220-240V	F
⑤ LED-A60-12	12W	E27	1200	220-240V	F
⑥ LED-A60-15	15W	E27	1500	220-240V	F
⑦ LED-A80-20	20W	E27	2000	220-240V	F

D:39mm
H:65mm



D:50mm
H:86mm



D:80mm
H:114mm

D:63mm
H:104mm




D:90mm
H:125mm



D:50mm
H:82mm



R SERIES



15 000H
 x12500
 CRI>80
 220-240V
 50-60HZ

	MODEL	WATT	BASE	LUMEN	Voltage	ENERG
①	R39	4.5W	E14	450	220-240V	F
②	R50	6W	E14	510	220-240V	F
③	R63	10W	E27	950	220-240V	F
④	R80	10W	E27	950	220-240V	F
④	R90	12W	E27	1200	220-240V	F




15 000h
 x12500
CRI>80



	MODEL	WATT	BASE	LUMEN	Voltage	ENERG
①	GU10	3W	GU10	250	220-240V	F
②	GU10	3.8W	GU10	300	220-240V	F
③	GU10	4.8W	GU10	400	220-240V	F
④	GU10	6W	GU10	500	220-240V	F
⑤	GU10	7W	GU10	650	220-240V	F
⑥	GU11	1.9W	GU11	150	220-240V	F
⑦	GU10	4.9W	MR16	400	12V	F



G SERIES

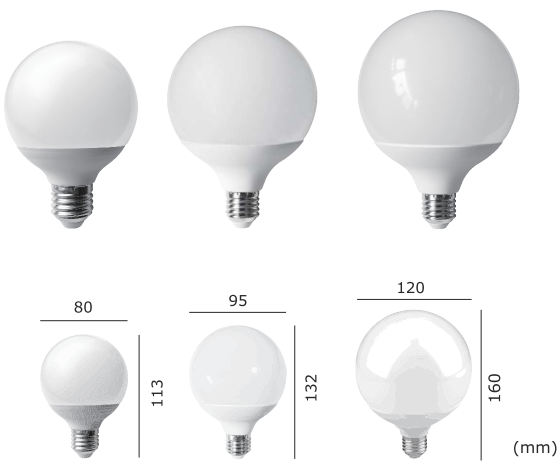

 15 000H
 X12500
CRI>80 **220-240V**
50-60Hz

	MODEL	WATT	BASE	LUMEN	Voltage	ENERG
①	G80	9W	E27	930	220-240V	F
②	G95	12W	E27	1200	220-240V	F
③	G120	15W	E27	1500	220-240V	F

T60



D:60mm
H:106mm



T70



D:70mm
H:123mm

T100



D:100mm
H:177mm

T120



D:118mm
H:198mm

T80



D:80mm
H:143mm

T140



D:137mm
H:226mm

T160



D:160mm
H:254mm




15 000H x12500 CRI>80 127/220V 50-60HZ

MODEL	WATT	Base	Color Temperature	LUMEN
LED-T60-15	15W	E27	3000-6500K	1500
LED-T70-20	20W	E27	3000-6500K	2000
LED-T80-25	25W	E27	3000-6500K	2500
LED-T100-30	30W	E27	3000-6500K	3000
LED-T120-40	40W	E27	3000-6500K	4000
LED-T140-50	50W	E27	3000-6500K	5000
LED-T140-60	60W	E27	3000-6500K	6000

High color rendering index

RA ≥ 90


Back to nature!

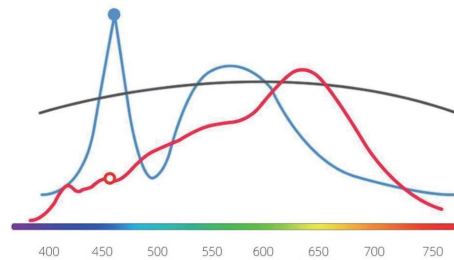

Advantages of full spectrum:

- It can reduce blue light and reduce damage to the retina.
- Supplement beneficial blue-green light to alleviate eye fatigue.
- Supplement red light, red vitamins, improve immunity to myopia.

- Traditional LED spectrum
- Solar spectrum
- CARE Full spectrum spectrogram



15 000H x12500 CRI:90 127/220V 50-60HZ

MODEL	WATT	BASE	LUMEN	VOLTAGE	ENERG
① GU10	3W/4.9W	GU10	250/400	220-240V	G/F
② C37	3W/4.9W	E14/E27	250/410	220-240V	G/G
③ G45	3W/4.9W	E14/E27	250/430	220-240V	G/F
④ A60	8W	E27	806	220-240V	F

A19 for American Standard



9W&11W



D:60mm
H:108mm

13W&14W



D:60mm
H:115mm



15 000H



x12500

CRI:80

120V
50-60Hz



A19

MODEL	WATT	Base	Color Temperature	LUMEN
LED-A19-9	9W	E26	3000K/5000K	830
LED-A19-11	11W	E26	3000K/5000K	1050
LED-A19-13	13W	E26	3000K/5000K	1300
LED-A19-14	14W	E26	3000K/5000K	1400

Segurança



Registro
XXX XXX/ANO

Série A

A55
(4.9W,6W,7W)



D:55mm
H:99mm

A60
(9W)



D:60mm
H:106mm

A60
(12W)



D:60mm
H:110mm

A60
(15W)



D:60mm
H:116mm

Série T

T60



D:60mm
H:96mm

T70



D:70mm
H:105mm

T80



D:80mm
H:120mm

T100



D:100mm
H:152mm

MODEL	WATT	Base	Color Temperature	LUMEN	PF
LED-A60-4.9	3W	E27	3000-6500K	450	0.4
LED-A60-6	5W	E27	3000-6500K	500-540	0.7
LED-A60-7	7W	E27	3000-6500K	510-560	0.7
LED-A60-9	9W	E27	3000-6500K	729-810	0.7
LED-A60-12	12W	E27	3000-6500K	980-1050	0.7
LED-A60-15	15W	E27	3000-6500K	1215-1350	0.7
LED-T60-20	20W	E27	3000-6500K	1450-1600	0.7
LED-T70-30	30W	E27	3000-6500K	2400	0.92
LED-T80-40	40W	E27	3000-6500K	3200	0.92
LED-T100-40	50W	E27	3000-6500K	4000	0.92



15 000H




x12500

CRI:80

127-220V
50-60HZ

LED G9




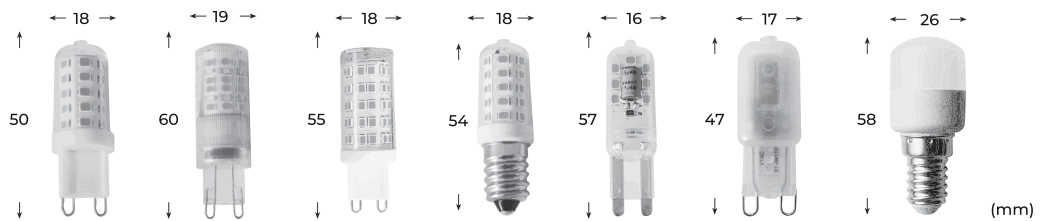

 **15 000H**
 **x12500**
CRI≥80
220-240V
50-60HZ


	MODEL	WATT	BASE	LUMEN	Voltage	ENERG
①	G9	3W	G9	230	220-240V	F
②	G9	3W/4W	G9	360/550	220-240V	E/D
③	G9	4W	G9	420	220-240V	F
④	G9	2W/3W	G9	200/350	220-240V	F
⑤	T18	3W	E14	360	220-240V	E
⑥	G9	2W	G9	220	220-240V	F
⑦	G9	2W	G9	190	220-240V	F
⑧	T26	2W	E14	200	220-240V	F

Aluminum Ceiling Light Fixture

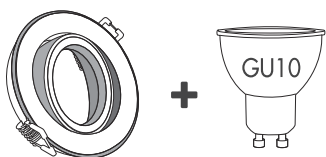

MODEL	WITH	SIZE(mm)	MATERIAL	SURFACE COLOR
SL-FCR-BK	GU10	Ø 8,4 × 6,3 cm	plastic, aluminium	Brushed Black
SL-FCR-SB	GU10	Ø 8,4 × 6,3 cm	plastic, aluminium	Brushed Silver
SL-FCR-SS	GU10	Ø 8,4 × 6,3 cm	plastic, aluminium	Silver Shine
SL-FCR-SDS	GU10	Ø 8,4 × 6,3 cm	plastic, aluminium	Sandy Silver
SL-FCR-GD	GU10	Ø 8,4 × 6,3 cm	plastic, aluminium	Brushed Gold

LED Fixture(aluminium)

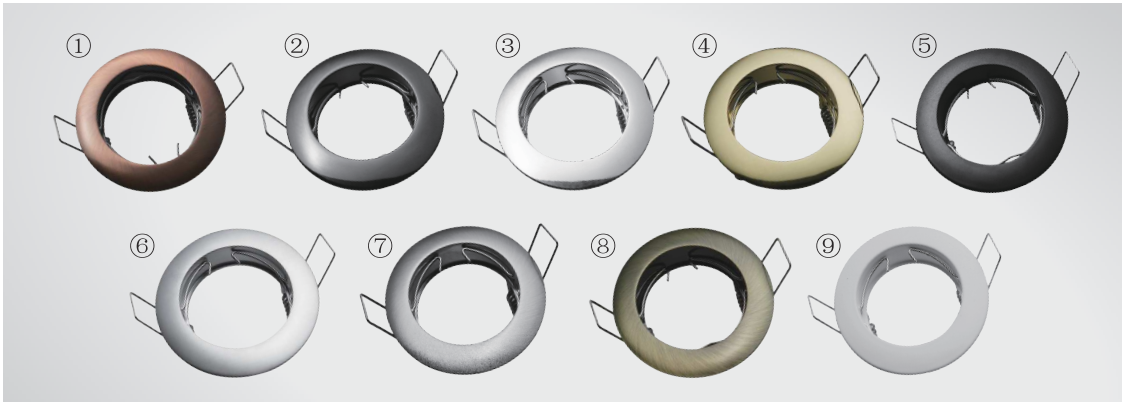

Paired with GU10 MAX 50W

Small size: $\phi 77 \times 25 \text{mm}$



Big size: $\phi 83 \times 35 \text{mm}$

 IP20

 cut size

$\phi 60 \text{mm}$

$\phi 73 \text{mm}$

- ①  Rose gold
- ②  Gun black
- ③  Silver shine

- ④  Shine gold
- ⑤  Matte black
- ⑥  Matte silver

- ⑦  Brushed silver
- ⑧  Copper
- ⑨  Matte white

 IP44




Paired with GU10 MAX 50W

Size: $\phi 83 \times 40 \text{mm}$

 cut size

$\phi 71 \text{mm}$

Atmosphere light

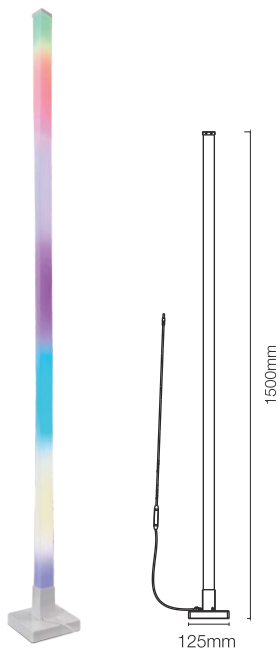

Manner of packing



PARAMETER

MODEL NO.	SL-Smart - FL - 150
MUSIC SENSOR	incl.remote control
SOCKET	LED integr.
WATTAGE	MAX 7W
LUMEN	125lm
VOLTAGE	100-240V
SAFTY CLASS	
DIMMABLE	YES
IP LEVEL	IP20



incl. remote control



music sensor



dimmable



digital RGB



LED

incl.



Mobile APP

You can combine any style you like~

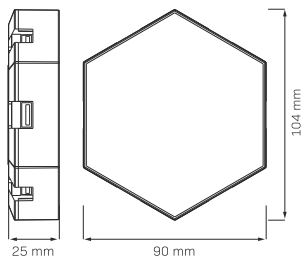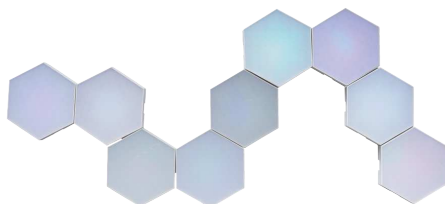


PARAMETER



MODEL NO.	LED-D6-RGB
MUSIC SENSOR	incl.remote control
SOCKET	LED integr.
WATTAGE	1W/PCS
LUMEN	17lm/PCS
VOLTAGE	100-240V
SAFTY CLASS	
DIMMABLE	YES
IP LEVEL	IP20
OUTPUT	5V 0.2A



Wall Lamp

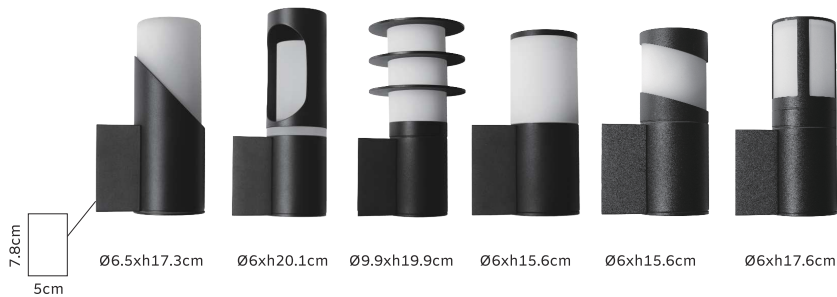

Material: aluminium

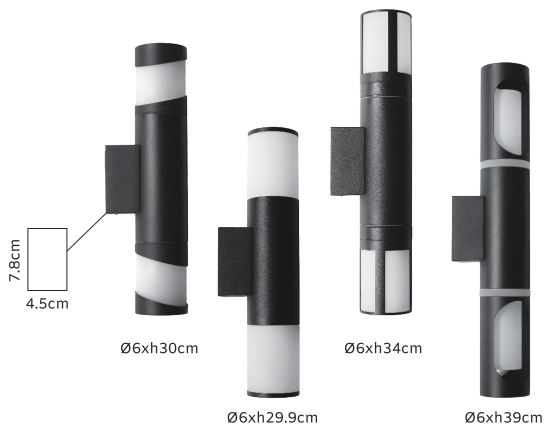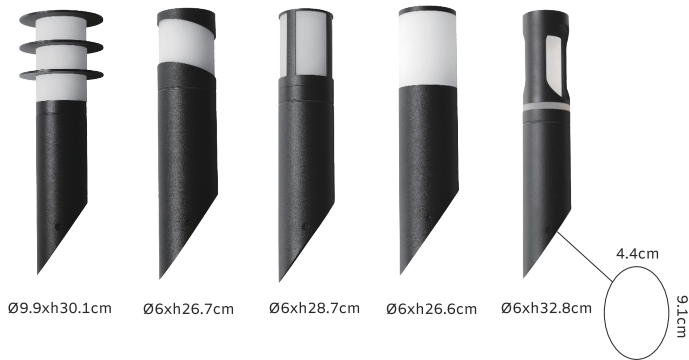

Outdoor floor lamp

