

Contact Grill

LS-GC02F

- Grill plate size: 320*220mm.
- Detachable and reversible use grill plate with non-stick coating.
- Grill plate open up to 180° degree.
- Damping structure which can hold the top plate at any angle of 40°-90°.
- Grill plate heating and thermo control in separately or together.
- Heating independently for base plate, top plate or both plates.
- One part build high strength handle.
- Detachable oil drip tray. Easy for take off and cleaning.
- White LCD Display for time and temperature.
- Temperature probe for more smart cooking control and performance.
- Steak cooking process indication.



Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-GC02F	1600	-	5.08	6	1	6.4	417X217X402	430X230X425	648	1348	1618	GS/CE/CB/ETL
LS-GC02F-H	2000	-	5.08	6	1	6.4	417X217X402	430X230X425	648	1348	1618	GS/CE/CB

Contact Grill

LS-GC04B

- Grill plate size: 344*264mm.
- Detachable and reversible use grill plate with non-stick coating.
- Grill plate open up to 180° degree.
- Damping structure which can hold the top plate at any angle of 40°-90°.
- Grill plate heating and thermo control in separately or together.
- Heating independently for base plate, top plate or both plates.
- Separate LCD display for temperature and time, temperature and time adjustable.
- One part build high strength handle.
- Detachable oil drip tray. Easy for take off and cleaning.
- Sensor touch and knob control.
- Default menu settings for Beef, Fish, Chicken, Sausage, Hamburg, Bacon.
- Temperature probe for more smart cooking control and performance.
- Concealed temperature probe storage box.



Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-GC04B	1750/2400	-	6.8	7.9	1	8.5	445X255X425	470X270X440	510	1022	1150	GS/CE/CB/ETL

Contact Grill

LS-GC06A

- Grill plate size: 320x220mm.
- Grill plate in slant position for fast oil draining during meat grill.
- Adjustable horizontal switch to lift the plate in horizontal level for flat grilling.
- Detachable and reversible use grill plate with a super higher grill temperature of 250°C.
- Open up to 180°C flat cooking, default BBQ heating level for easy operation.
- Large LED display, touch buttons with illumination ring.
- Default cooking menus for different food.
- Double oil tray in front and back.



Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20'(pcs)	40'(pcs)	40'HQ(pcs)	Certifications
LS-GC06A	1600	-	5.3	6.5	1	7.0	433X280X424	446X293X447	473	998	1038	ETL
LS-GC06A-H	2000	-	5.3	6.5	1	7.0	433X280X424	446X293X447	473	998	1038	CE/CB

LS-GC02A



- Grill plate size: 320*220mm.
- Detachable and reversible use grill plate with non-stick coating.
- Grill plate open up to 180° degree.
- Damping structure which can hold the top plate at any angle of 40°-90°.
- Grill plate heating and thermo control in separately or together.
- Heating independently for base plate, top plate or both plates.
- Separate LED display for temperature and time, temperature and time adjustable.
- One part build high strength handle.
- Detachable oil drip tray. Easy for take off and cleaning.
- Sensor touch control.
- Color indication light for cooking process indication.

Contact Grill

LS-GC02C



- Grill plate size: 320*220mm.
- Detachable and reversible use grill plate with non-stick coating.
- Grill plate open up to 180° degree.
- Damping structure which can hold the top plate at any angle of 40°-90°.
- Grill plate heating and thermo control in separately or together.
- Heating independently for base plate, top plate or both plates.
- Separate LED display for temperature and time, temperature and time adjustable.
- One part build high strength handle.
- Detachable oil drip tray. Easy for take off and cleaning.

Contact Grill

LS-GC02D



- Grill plate size: 320*220mm.
- Detachable and reversible use grill plate with non-stick coating
- Grill plate open up to 180° degree
- Damping structure which can hold the top plate at any angle of 40°-90°.
- Grill plate heating and thermo control in separately or together
- Heating independently for base plate, top plate or both plates.
- Separate LED display for temperature and time, temperature and time adjustable.
- One part build high strength handle
- Detachable oil drip tray. Easy for take off and cleaning.
- Sensor touch control.
- Color indication light for cooking process indication.
- Default menu settings for Beef, Fish, Chicken, Sausage, Hamburg, Bacon.

Contact Grill

Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-GC02A	1600/2000	-	5.08	6	1	6.4	417X217X402	430X230X425	648	1348	1618	GS/CE/CB/ETL
LS-GC02C	1600/2000	-	5.08	6	1	6.4	417X217X402	430X230X425	648	1348	1618	GS/CE/CB/ETL
LS-GC02D	1600/2000	-	5.08	6	1	6.4	417X217X402	430X230X425	648	1348	1618	GS/CE/CB/ETL



LS-GC02E

- Grill plate size: 320*220mm.
- Detachable and reversible use grill plate with non-stick coating.
- Grill plate open up to 180° degree.
- Damping structure which can hold the top plate at any angle of 40°-90°.
- Grill plate heating and thermo control in separately or together.
- Heating independently for base plate, top plate or both plates.
- Separate LED display for temperature and time, temperature and time adjustable.
- One part build high strength handle.
- Detachable oil drip tray. Easy for take off and cleaning.
- Default menu settings for Beef, Fish, Chicken, Sausage, Hamburg, Bacon.

Contact Grill

LS-GC02G



- Grill plate size: 320*220mm.
- Detachable and reversible use grill plate with non-stick coating.
- Grill plate open up to 180° degree.
- Damping structure which can hold the top plate at any angle of 40°-90°.
- Grill plate heating and thermo control in separately or together.
- Heating independently for base plate, top plate or both plates.
- Separate LED display for temperature and time, temperature and time adjustable.
- One part build high strength handle.
- Detachable oil drip tray. Easy for take off and cleaning.
- Default menu settings for Beef, Fish, Chicken, Sausage, Hamburg, Bacon.

Contact Grill

LS-GC02H



- Grill plate size: 320*220mm.
- Detachable and reversible use grill plate with non-stick coating.
- Grill plate open up to 180° degree.
- Damping structure which can hold the top plate at any angle of 40°-90°.
- Grill plate heating and thermo control in separately or together.
- Heating independently for base plate, top plate or both plates.
- Separate LED display for temperature and time, temperature and time adjustable.
- Detachable oil drip tray. Easy for take off and cleaning.
- Default menu settings for Beef, Fish, Chicken, Sausage, Hamburg, Bacon.
- Intelligent cooking control with Thickness Detection Sensor.

Contact Grill

Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40'HQ(pcs)	Certifications
LS-GC02E	1600/2000	-	5.08	6	1	6.4	417X217X402	430X230X425	648	1348	1618	GS/CE/CB/ETL
LS-GC02G	1600/2000	-	5.08	6	1	6.4	417X217X402	430X230X425	648	1348	1618	GS/CE/CB/ETL
LS-GC02H	1600/2000	-	5.08	6	1	6.4	417X217X402	430X230X425	648	1348	1618	GS/CE/CB/ETL

ENJOY +



LS-GC02J

- Grill plate size: 320*220mm.
- Detachable and reversible use grill plate with non-stick coating.
- Grill plate open up to 180° degree.
- Damping structure which can hold the top plate at any angle of 40°-90°.
- Grill plate heating and thermo control in separately or together.
- Heating independently for base plate, top plate or both plates.
- Separate LED display for temperature and time, temperature and time adjustable.
- Strengthened bakelite with Aluminum handle.
- Detachable oil drip tray. Easy for take off and cleaning.
- Default menu settings for Beef, Fish, Chicken, Sausage, Hamburg, Bacon.

Contact Grill



LS-GC02K

- Grill plate size: 320*220mm.
- Detachable and reversible use grill plate with non-stick coating.
- Grill plate open up to 180° degree.
- Damping structure which can hold the top plate at any angle of 40°-90°.
- Grill plate heating and thermo control in separately or together.
- Heating independently for base plate, top plate or both plates.
- Separate LED display for temperature and time, temperature and time adjustable.
- Strengthened bakelite with Aluminum handle.
- Detachable oil drip tray. Easy for take off and cleaning.
- Default menu settings for Beef, Fish, Chicken, Sausage, Hamburg, Bacon.

Contact Grill



LS-GH02L

- Grill plate size: 320*220mm.
- Detachable and reversible use grill plate with non-stick coating.
- Grill plate open up to 180° degree.
- Damping structure which can hold the top plate at any angle of 40°-90°.
- Grill plate heating and thermo control in separately or together.
- Heating independently for base plate, top plate or both plates.
- Separate LED display for temperature and time, temperature and time adjustable.
- Strengthened bakelite with Aluminum handle.
- Detachable oil drip tray. Easy for take off and cleaning.
- Default menu settings for Beef, Fish, Chicken, Sausage, Hamburg, Bacon.

Contact Grill

Model	Power	Capacity	N.W. (kg)	G.W. (kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ (pcs)	Certifications
LS-GC02J	1600/2000	-	5.08	6	1	6.4	417X217X402	430X230X425	648	1348	1618	GS/CE/CB/ETL
LS-GC02K	1600/2000	-	5.08	6	1	6.4	417X217X402	430X230X425	648	1348	1618	GS/CE/CB/ETL
LS-GC02L	1600/2000	-	5.08	6	1	6.4	417X217X402	430X230X425	648	1348	1618	GS/CE/CB/ETL

LS-GC02N



- Grill plate size: 320*220mm.
- Detachable and reversible use grill plate with non-stick coating.
- Grill plate open up to 180° degree.
- Damping structure which can hold the top plate at any angle of 40°-90°.
- Grill plate heating and thermo control in separately or together.
- Heating independently for base plate, top plate or both plates.
- Separate LED display for temperature and time, temperature and time adjustable.
- One part build high strength handle.
- Detachable oil drip tray. Easy for take off and cleaning.

Contact Grill

LS-GC02N-A



- Grill plate size: 320*220mm.
- Detachable and reversible use grill plate with non-stick coating.
- Grill plate open up to 180° degree.
- Damping structure which can hold the top plate at any angle of 40°-90°.
- Grill plate heating and thermo control in separately or together.
- Heating independently for base plate, top plate or both plates.
- Separate LED display for temperature and time, temperature and time adjustable.
- Colour screen display.
- One part build high strength handle.
- Detachable oil drip tray. Easy for take off and cleaning.

Contact Grill

LS-GC02P



- Grill plate size: 320*220mm.
- Detachable and reversible use grill plate with non-stick coating.
- Grill plate open up to 180° degree.
- Damping structure which can hold the top plate at any angle of 40°-90°.
- Grill plate heating and thermo control in separately or together.
- Heating independently for base plate, top plate or both plates.
- Separate LED display for temperature and time, temperature and time adjustable.
- One part build high strength handle.
- Detachable oil drip tray. Easy for take off and cleaning.
- Default menu settings for Beef, Fish, Chicken, Sausage, Hamburg, Bacon.

Contact Grill

Model	Power	Capacity	N.W. (kg)	G.W. (kg)	Packs	Carton G.W. (kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ (pcs)	Certifications
LS-GC02N	1600/2000	-	5.08	6	1	6.4	417X217X402	430X230X425	648	1348	1618	GS/CE/CB/ETL
LS-GC02N-A	1600/2000	-	5.08	6	1	6.4	417X217X402	430X230X425	648	1348	1618	GS/CE/CB/ETL
LS-GC02P	1600/2000	-	5.08	6	1	6.4	417X217X402	430X230X425	648	1348	1618	GS/CE/CB/ETL



LS-GC03A

- Grill plate size: 310*220mm.
- Grill plate open up to 180° degree.
- Smart temperature control, LED display for temperature and time.
- 4 default functions, 2 separate heating function (Both Grill/Lower Grill).
- Sensor touch control buttons.
- Upper and bottom plate floating height 42mm (max height 42mm for cooking).
- Removable oil drip tray for easy cleaning.
- Detachable grill plates for dishwasher safe.
- Optional for bottom grill plate heating separately and together heating.

Contact Grill



LS-GC03B

- Grill plate size: 320*220mm.
- Grill plate open up to 180° degree.
- Smart temperature control, LED display for temperature and time.
- 4 default functions, 1 separate heating function (Both Grill).
- Sensor touch control buttons.
- Upper and bottom plate floating height 42mm (max height 42mm for cooking).
- Removable oil drip tray for easy cleaning.
- Detachable grill plates for dishwasher safe.
- Stainless steel decoration panel with knob control.

Contact Grill



LS-GC05A

- Grill plate size: 291*230mm.
- Preset 6 menu functions and manual adjustment functions.
- Adjustable time and temperature control.
- Knobs control for easy operation.
- Stainless steel decoration.
- Both plates heating and bottom plate heating optional.
- 180°C open flat cooking.

Contact Grill

Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-GC03A	1600/2000	-	3.90	4.5	1	5.0	365X190X400	380X203X428	830	1738	2050	GS/CE/CB/ETL
LS-GC03B	1600/2000	-	3.90	4.5	1	5.0	365X190X400	380X203X428	830	1738	2050	GS/CE/CB/ETL
LS-GC05A	1600/2000	-	4.50	5.3	1	6.1	400X240X395	415X255X420	583	1213	1348	GS/CE/CB/ETL

LS-GC04A



- Large Grill plate size: 344*264mm.
- Detachable and reversible use grill plate with non-stick coating.
- Grill plate open up to 180° degree.
- Damping structure which can hold the top plate at any angle of 40°-90°.
- Grill plate heating and thermo control in separately or together.
- Heating independently for base plate, top plate or both plates.
- Separate LED display for temperature and time, temperature and time adjustable.
- One part build high strength handle.
- Detachable oil drip tray. Easy for take off and cleaning.
- Sensor touch control.
- Default menu settings for Beef, Fish, Chicken, Sausage, Hamburg, Bacon.

Contact Grill

LS-GC04B



- Large Grill plate size: 344*264mm.
- Detachable and reversible use grill plate with non-stick coating.
- Grill plate open up to 180° degree.
- Damping structure which can hold the top plate at any angle of 40°-90°.
- Grill plate heating and thermo control in separately or together.
- Heating independently for base plate, top plate or both plates.
- Separate LCD display for temperature and time, temperature and time adjustable.
- One part build high strength handle.
- Detachable oil drip tray. Easy for take off and cleaning.
- Sensor touch and knob control.
- Default menu settings for Beef, Fish, Chicken, Sausage, Hamburg, Bacon.
- Temperature probe for more smart cooking control and performance.

Contact Grill

LS-GC04C



- Large Grill plate size: 344*264mm.
- Detachable and reversible use grill plate with non-stick coating.
- Grill plate open up to 180° degree.
- Damping structure which can hold the top plate at any angle of 40°-90°.
- Grill plate heating and thermo control in separately or together.
- Heating independently for base plate, top plate or both plates.
- Separate LED display for temperature and time, temperature and time adjustable.
- One part build high strength handle.
- Detachable oil drip tray. Easy for take off and cleaning.
- Knob and key control.

Contact Grill

Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20'(pcs)	40'(pcs)	40'HQ(pcs)	Certifications
LS-GC04A	1750/2200	-	7.0	8.1	1	8.7	442X268X441	455X281X464	498	1023	1123	GS/CE/CB/ETL
LS-GC04B	1750/2200	-	7.0	8.1	1	8.7	442X268X441	455X281X464	498	1023	1123	GS/CE/CB/ETL
LS-GC04C	1750/2200	-	7.0	8.1	1	8.7	442X268X441	455X281X464	498	1023	1123	GS/CE/CB/ETL

Waffle Maker

LS-WM01A

- Plate size of 230x130mm for 2 pcs waffles.
- Digital control, Large LCD display for time and temperature.
- 6 preset waffle taste for easy operation.
- 5 default cooking menus.
- Detachable Waffle plate, sandwich plate and grill plate are optional use.
- Strengthened locking structure.
- 1 piece aluminum handle with stainless steel housing.



Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-WM01A	1000	-	3.9	4.8	1	5.1	315x260x235	325x270x255	1232	2520	2880	CE/CB/ETL

LS-WM01A

- Plate size of 230x130mm for 2 pcs waffles.
- Digital control, Large LCD display for time and temperature.
- 6 preset waffle taste for easy operation.
- 5 default cooking menus.
- Detachable Waffle plate, sandwich plate and grill plate are optional use.
- Strengthened locking structure.
- 1 piece aluminum handle with stainless steel housing.



Waffle Maker

LS-WM01B

- Plate size of 230x130mm for 2 pcs waffles.
- Digital control, Large LCD display for time and temperature.
- Touch control operation interface.
- 6 preset waffle taste for easy operation.
- 5 default cooking menus.
- Detachable Waffle plate, sandwich plate and grill plate are optional use.
- Strengthened locking structure.
- 1 piece aluminum handle with stainless steel housing.



Waffle Maker

LS-WM02A

- Plate size of 230x130mm for 2 pcs waffles.
- Digital control, Large LCD display for time and temperature.
- 6 preset waffle taste for easy operation.
- 5 default cooking menus.
- Detachable Waffle plate, sandwich plate and grill plate are optional use.
- Strengthened locking structure.
- 1 piece aluminum handle with stainless steel housing.



Waffle Maker

Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-WM01A	1000	-	2.7	3.9	2	8.3	363X288X215	376X301X460	1138	2278	2478	CE/CB/ETL
LS-WM01B	1000	-	2.7	3.9	2	8.3	363X288X215	376X301X460	1138	2278	2478	CE/CB/ETL
LS-WM02A	1000	-	2.7	3.9	2	8.3	363X288X215	376X301X460	1138	2278	2478	CE/CB/ETL

LS-WM02B



- Plate size of 230x130mm for 2 pcs waffles.
- Digital control, Large LCD display for time and temperature.
- Touch control operation interface.
- 6 preset waffle taste for easy operation.
- 5 default cooking menus.
- Detachable Waffle plate, sandwich plate and grill plate are optional use.
- Strengthened locking structure.
- 1 piece aluminum handle with stainless steel housing.

Waffle Maker

LS-WM02C



- Plate size of 230x130mm for 2 pcs waffles.
- Digital control, Large LCD display for time and temperature.
- 6 preset waffle taste for easy operation.
- 5 default cooking menus.
- Detachable Waffle plate, sandwich plate and grill plate are optional use.
- Strengthened locking structure.
- 1 piece aluminum handle with stainless steel housing.
- New circular white LED light button.

Waffle Maker

LS-WM03A



- Plate size of 214x214mm for 2 pcs waffles.
- Digital control, Large LCD display for time and temperature.
- 6 preset waffle taste for easy operation.
- 5 default cooking menus.
- Detachable Waffle plate, doughnut plate and cookie plate are optional use.
- Strengthened locking structure.
- 1 piece aluminum handle with stainless steel housing.

Waffle Maker

Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-WM02B	1000	-	2.7	3.9	2	8.3	363X288X215	376X301X460	1138	2278	2478	CE/CB/ETL
LS-WM02C	1000	-	2.7	3.9	2	8.3	363X288X215	376X301X460	1138	2278	2478	CE/CB/ETL
LS-WM03A	1000	-	2.7	3.9	2	8.3	316X203X377	420X330X400	976	2026	2100	CE/CB/ETL

Air Grill

LS-AG01A

- Large Grill Plate Size: 344 x 264 mm.
- Upper and lower intelligent temperature control and independent temperature control.
- Separate LED display for time and temperature, time and temperature adjustable.
- Preset 11 programs, touch control operation interface.
- Cancel the preheating process for user purpose, which is more convenient to use.
- Maximum set temperature of 515F (260°C) for Air Grill cooking.
- Maximum set temperature of 450F (230°C) for Grill cooking.
- Multi-functional grill plate with 2H hardness non-stick coating, which is detachable and reversible use.
- Removable oil draining tray outside the heating space, which makes less smoke.
- Non-stick coated inner shield & heater cover for easy Cleaning.
- Power cord wrapping hook for easy storage.



Model	Power	Capacity	N.W. (kg)	G.W. (kg)	Packs	Carton G.W. (kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ (pcs)	Certifications
LS-AG01A	1650/1500	6.0L	9.6	10.5	1	11.5	495X430X360	510X445X385	330	690	780	CE/CB/ETL
LS-AG01A-P	1650/1500	6.0L	9.6	10.5	1	11.5	495X430X360	510X445X385	330	690	780	CE/CB/ETL

Air Grill

LS-AG02A

- Power: Top heating 1500W+Base heating200W, total 1700W.
- Capacity: 7.0L(7.5Qt).
- Large and flat baking pan, Up to 12” pizza can be cooked.
- Max 10 pcs steak and down element together, fast and more even heat.
- 7 preset finction options: beef, fries, pizza, air fryer, bake, broil, grill.
- Maximum setting temperature up to 480F (250°C).
- Caramic coating of grill plate/pot, PTFE and PFOA free, food contact safe and food contact safe and durable.
- Temperature probe function as option.
- Baking pan size: 330X330X62mm.
- IPX4 water proof, available for outdoor use.



Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-AG02A	1700	8L	8.5	9.4	1	10.4	460X540X340	475X555X370	290	640	730	CE/CB/ETL



Air Grill Cooker

LS-AC02A6

- Non-stick Coated die-casting grill plate with a size of 289x214 mm.
- LED display with Time and Temperature.
- 7 default programs for roast, air fry, dehydrate, fries, beef, air grill.
- Perfect air grilled results with 4 level control settings.
- The wide temperature range of 105F-515F (265°C).
- Damping structure to hold the lid sit safe.
- Independent thermal control on Air frying cooking.
- 50WAC motor fans for strong blowing air circulation and better cooking performance.
- Dishwasher safe grill plate, frying basket and inner bowl.



Air Grill Cooker

LS-AC02B6

- Non-stick Coated die-casting grill plate with a size of 289x214 mm.
- LED display with Time and Temperature.
- 7 default programs for roast, air fry, briol, bake, fries, beef, air grill.
- Perfect air grilled results with 4 level control settings: low, medium, high, and max.
- The wide temperature range of 105F-515F (265°C).
- Damping structure to hold the lid sit safe.
- Independent thermal control on Air frying cooking.
- 50WAC motor fans for strong blowing air circulation and better cooking performance.
- Dishwasher safe grill plate, frying basket and inner bowl.



Air Grill Cooker

LS-AC02D6

- Non-stick Coated die-casting grill plate with a size of 289x214 mm.
- LED display with Time and Temperature.
- 7 default programs for roast, air fry, briol, bake, air grill.
- Perfect air grilled results with 4 level control settings: low, medium, high, and max.
- The wide temperature range of 105F-515F (265°C).
- Damping structure to hold the lid sit safe.
- Independent thermal control on Air frying cooking.
- 50WAC motor fans for strong blowing air circulation and better cooking performance.
- Dishwasher safe grill plate, frying basket and inner bowl.
- Two knobs control for easy time and temperature setting.

Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-AC02A6	1660	6.0L	7.1	8.7	1	9.3	417X417X340	430X430X365	414	854	994	ETL/CB
LS-AC02B6	1660	6.0L	7.1	8.7	1	9.3	417X417X340	430X430X365	414	854	994	ETL/CB
LS-AC02D6	1660	6.0L	7.1	8.7	1	9.3	417X417X340	430X430X365	414	854	994	ETL/CB

LS-AC02F6-P



- LED display with Time and Temperature.
- Perfect air grilled results with 4 level control settings: low, medium, high, and max.
- The wide temperature range of 105F-515F (265°C).
- Damping structure to hold the lid sit safe.
- Independent thermal control on Air frying cooking.
- Dishwasher safe grill plate, frying basket and inner bowl.
- Two knobs control for easy time and temperature setting.
- Perfect grilled results with temperature probe for more precise cooking doneness control.

Air Grill Cooker

LS-AC02A6E



- Die-casting aluminum grill grate with size of 289x214mm.
- Black Plastic cool touch lid.
- LED display with Time and Temperature.
- 6 default programs for broil, roast, bake, fries, air fryer, air grill.
- Perfect air grilled results with 4 level control settings : low, medium, high and max.
- Large motor fans for strong blowing 360° air circulation and better cooking performance.
- The wide temperature range of 105F-515F. 515F (265°C) hot air circulates around food for amazing Surround searing.
- Non-stick coated inner shield & heater cover for easy Cleaning.
- With grill grate and large SUS304 frying basket.

Air Grill Cooker

LS-AC06C6



- Die-casting aluminum grill grate with size of 289x214mm.
- Black Plastic cool touch material housing.
- LED display with Time and Temperature.
- 5 default programs for broil, roast, bake, air fryer, air grill.
- Perfect air grilled results with 3 level control settings : low, medium, high.
- Large motor fans for strong blowing 360° air circulation and better cooking performance.
- The wide temperature range of 105F-515F. 515F (265°C) hot air circulates around food for amazing Surround searing.
- Non-stick coated inner shield & heater cover for easy Cleaning.
- With grill grate and large SUS304 frying basket.

Air Grill Cooker

Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-AC02F6-P	1660	6.0L	7.1	8.7	1	9.3	417X417X340	430X430X365	414	854	994	ETL/CB
LS-AC02A6E	1660	6.0L	7.1	8.7	1	9.3	417X417X340	430X430X365	414	854	994	ETL/CB
LS-AC06C6	1660	6.0L	6.7	7.6	1	8.5	450X440X380	465X455X405	493	1044	1078	CE/CB/ETL

Air Fryer

LS-AC05A4

- Large viewing window plus Easy light up light, food cooking process can be seen at any time!
- Powerful blowing fan design, for a faster and more even heating.
- Defaulting 6 different type of cooking functions.
- LED display to show time and temperature.
- Removable non-stick frying mesh.
- Dishwasher safe for full frying basket.



Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-AC05A4	1600	4.0L	4.4	4.6	1	5.0	323X323X355	338X338X380	610	1222	1426	CE/CB/UKCA
LS-AC05A4	1500	4.0L	4.4	4.6	1	5.0	323X323X355	338X338X380	610	1222	1426	ETL

LS-AC05B4



- Large viewing window plus Easy light up light, food cooking process can be seen at any time!
- Powerful blowing fan design, for a faster and more even heating.
- Defaulting 6 different type of cooking functions.
- LED display to show time and temperature.
- Removable non-stick frying mesh.
- Dishwasher safe for full frying basket.



Air Fryer

LS-AC05C4



- Large viewing window plus Easy light up light, food cooking process can be seen at any time!
- Powerful blowing fan design, for a faster and more even heating.
- Defaulting 6 different type of cooking functions.
- LED display to show time and temperature.
- Removable non-stick frying mesh.
- Dishwasher safe for full frying basket.
- Additional food warmer on the base, keep the cooked food in taste temperature.
- 3L capacity food warmer and keep the temperature at 60°C.



Air Fryer

LS-AC07A8



- Large viewing window plus Easy light up light, food cooking process can be seen at any time!
- Powerful blowing fan design, for a faster and more even heating.
- Defaulting 12 different type of cooking functions.
- LED display to show time and temperature.
- Sensor touch control.
- Removable non-stick frying mesh.
- Dishwasher safe for full frying basket.



Air Fryer

Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-AC5B4	1600	4.0L	4.4	4.6	1	5.0	323X323X355	338X338X380	610	1222	1426	CE/GS/CB/UKCA/ETL
LS-AC5C4	1600	4.0L	4.8	5.2	1	5.5	350X350X350	360X360X415	448	928	1114	CE/GS/CB/UKCA/ETL
LS-AC7A8	1600	8.0L	5.4	5.6	1	6.0	395X325X390	405X335X410	423	873	1048	CE/GS/CB/UKCA/ETL

Multi Cooker

LS-MC03A

- 8.5Qt Large aluminum pot with lifting handles.
- Ceramic non-stick coating inner pot .
- 1500W high power for max cooking temperature of 220 °C (430F).
- LED display with knob control for easy operation.
- Multi functions for Slow Cook, Sear/Saute, Roast, Steam, Stew, Rice, Multi Grain, etc.



Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-MC03A	1500	8.5Qt	4.6	5.7	1	6.2	476X350X334	490X365X64	430	952	1090	CE/CB/ETL

Multi Cooker

LS-MC01B

- 5.5L Casting Iron pot and lid with enamel coating.
- Pot are stove top safe and oven safe.
- Default 6 Multi functions for Slow cook, Saute, Steam, Hot pot, Yogurt, Sear.
- Time and temperature display and adjustable.
- Cooking setting temperature range from 40-200°C .
- Cool touch pot and lid handle (A13 pass).
- Food contact safe enamel coating for easy cleaning.
- Stainless steel decoration panel.
- Power cord wrap on bottom for easy storage.



Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ (pcs)	Certifications
LS-MC01B	1250	5.5L	9.4	11.5	1	11.9	516X326X284	531X341X299	614	1230	1384	GS/CE/CB/ETL

ENJOY +



Multi Cooker

LS-MC513

- Transparent tempered glass lid.
- T=1.8mm Bi-ply stainless steel inner pot.
- Coated die-casting heating plate with dry boil protection.
- Plated Aluminum inner housing.
- Big LCD display in blue.
- Multi functions for: Sous Vide; Roast, Bake, Saute, Slow cook, Yoghurt, Simmer, Rice, Steam, Fry, Keep warm etc.
- 24 hours preset timer.
- Intelligent control with mobile phone, DIY recipes by consumers.
- Temperature DIY default function: 40-180°C.
- Time and temperature display function.
- Stainless steel handle.



Multi Cooker

LS-MC520A

- Transparent tempered glass lid.
- T=2.8mm Aluminum pot with non-stick coating.
- Coated die-casting heating plate with dry boil protection.
- Plated Aluminum inner housing.
- LED display in blue.
- Multi functions for: Sous Vide; Roast, Bake, Saute, Slow cook, Yoghurt, Simmer, Rice, Steam, Fry, Keep warm etc.
- 24 hours preset timer.
- Temperature DIY default function: 30-210°C.
- Time and temperature display function.



Multi Cooker

LS-MC601

- Transparent tempered glass lid.
- T=1.7mm Aluminum pot with non-stick coating.
- Coated die-casting heating plate with dry boil protection.
- Plated Aluminum inner housing.
- LED display in blue.
- Multi functions for: Sous Vide; Roast, Bake, Saute, Slow cook, Yoghurt, Simmer, Rice, Steam, Fry, Keep warm etc.
- 24 hours preset timer.
- Temperature DIY default function: 30-210°C.
- Time and temperature display function.



Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-MC513	1500	6.0L	5.8	6.9	1	7.4	538X335X235	550X350X260	592	1240	1378	CB/CE/ETL
LS-MC520A	1500	6.0L	4.8	6.0	1	6.7	455X345X245	470X360X265	6 8	1270	1482	CB/CE/ETL
LS-MC601	1250	6.0L	4.8	6.0	1	6.7	455X345X245	470X360X265	628	1270	1482	CB/CE/ETL



LS-MC01A

- Removable ceramic coated grill pan with 390X256mm dimension.
- Removable non-stick coating pot with 6L capacity.
- Optional large plastic food steamer with 4L capacity.
- Default 8 Multi functions for Slow cook, Boil, Saute, Bake, Steam, hot pot, Yogurt, Porridge etc.
- Time and temperature display and adjustable.
- Cooking setting temperature range from 40°C - 200°C.



Multi Cooker



LS-MC01B-A

- Removable ceramic coated grill pan with 390X256mm dimension.
- Removable non-stick coating pot with 6L capacity.
- Optional large plastic food steamer with 4L capacity.
- Default 6 Multi functions for Slow cook, Saute, Steam, Sear.
- Time and temperature display and adjustable.
- Stainless steel decoration panel.
- Cooking setting temperature range from 40°C - 200°C.
- Power cord wrap on bottom for easy storage.



Multi Cooker



LS-MC02A

- 6L SUS304 stainless steel pot with triple layers composite bottom.
- S/S pot is also hotplate top safe and oven safe.
- Inner pot with handles for easy use.
- Stainless steel housing .
- Multi functions for Slow Cook, Sear/Sauté, Steam, Stew, Rice, Yogurt.
- Time and temperature adjustable, LED display.



Multi Cooker

Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ (pcs)	Certifications
LS-MC01A	1250	6.0L	5.0	5.9	1	6.5	465X335X305	480X350X330	492	1092	1242	CB/CE/ETL
LS-MC01B-A	1250	6.0L	5.7	7.0	1	7.3	470X325X380	428X337X403	410	840	1000	CB/CE/ETL
LS-MC02A	1000	6.0L	3.2	4.0	1	4.2	320X320X320	332X332X345	680	1350	1430	CB/CE/ETL

Deep Fryer

LS-SC40D

- 5.0L oil capacity with enamel bowl.
- Digital control, Large LCD display.
- NTC sensor for more precise temperature control .
- Stainless steel housing and decoration panel.
- Default 7 cooking menus.
- Stainless steel lid with large viewing window.
- Removable oil filtration mesh for oil cleaning reuse.



Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-SC40D	1750	5L	4.2	5.8	1	5.9	421X392X303	429X405X325	455	980	1120	CE/CB/ETL



SH-7K234

- Polished stainless steel housing.
- Variable temperature control.
- Stainless steel lid.
- Power and heating indicator lights.
- Enameled inner pot and S/S inner pot optional.



Deep Fryer



SH-SM28N

- Stainless steel housing.
- Variable temperature control.
- With timer function.
- Plastic lid with transparent window and filter.
- Power and heating indicator lights.
- Enameled inner pot and S/S inner pot optional.



Deep Fryer



LS-SM30D

- Stainless steel housing.
- Variable temperature control.
- With timer function.
- Plastic lid with transparent window and filter.
- Power and heating indicator lights.
- Enameled inner pot and S/S inner pot optional.



Deep Fryer

Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
SH-7K234	2200	3.0L	2.3	2.8	4	11.9	415X235X265	485X440X555	960	1920	2412	GS/CE/CB/ETL
SH-SM28N	2200	3.0L	2.5	3.0	2	6.70	425X235X265	485X440X290	976	1990	2304	GS/CE/CB
LS-SM30D	2200	3.0L	3.50	4.3	4	9.3	415X235X265	485X440X555	960	1920	2412	GS/CE/CB

ENJOY +



LS-SM30C

- Stainless steel housing.
- Variable temperature control.
- Stainless steel lid.
- Power and heating indicator lights.
- Enameled inner pot and S/S inner pot optional.



Deep Fryer



SH-SM40C

- Stainless steel housing.
- Stainless steel control panel.
- Variable temperature control.
- Plastic lid with transparent window and filter.
- Power and heating indicator lights.
- Enameled inner pot and S/S inner pot optional.



Deep Fryer



LS-SC40C

- 4.0L oil capacity with enamel bowl.
- Digital control, Large LCD display.
- NTC sensor for more precise temperature control.
- Stainless steel housing and decoration panel.
- Default 7 cooking menus.
- Stainless steel lid with large viewing window.
- Removable oil filtration mesh for oil cleaning reuse.



Deep Fryer

Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-SM30C	2200	3.0L	2.95	3.9	2	8.7	365X270X240	380X285X505	1052	2204	2480	GS/CE/CB
SH-SM40C	2200	4.0L	3.20	3.8	2	8.3	395X280X283	575X405X308	842	1808	1808	GS/CE/CB
LS-SC40C	2200	4.0L	3.20	3.8	2	8.3	395X280X283	575X405X308	842	1808	1808	GS/CE/CB



SH-7K234x2

- Stainless steel housing.
- Variable temperature control.
- Stainless steel lid.
- Power and heating indicator lights.
- Enameled inner pot and S/S inner pot optional.



Deep Fryer



LS-SM30Cx2

- Stainless steel housing.
- Stainless steel panel.
- Variable temperature control.
- Plastic lid with window and filter.
- Power and heating indicator lights.
- Enameled inner pot and S/S inner pot optional.



Deep Fryer



SH-ST40D

- Stainless steel housing.
- Variable temperature control.
- Plastic lid with window and filter.
- Power and heating indicator lights.
- Enameled inner pot.




Deep Fryer

Model	Power	Capacity	N.W. (kg)	G.W. (kg)	Packs	Carton G.W. (kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ (pcs)	Certifications
SH-7K234x2	1800x2	6.0L	4.5	5.2	1	6.2	425X415X265	535X430X280	520	1080	1215	GS/CE/CB
LS-SM30Cx2	1800x2	6.0L	4.5	5.2	1	6.2	425X415X265	535X430X280	520	1080	1215	GS/CE/CB
SH-ST40D	2200	4.0L	4.2	5.3	2	12.1	413X382X334	433X394X690	420	879	1060	GS/CE/CB

Sous Vide Cooker

LS-SV02T

- IPX7 waterproof.
- White LED display.
- Temperature and timer display.
- Sensor touch control.
- Temperature reaching alarm.
- Temperature precision tolerance $\pm 0.2^{\circ}\text{C}$.
- Reliable fixing structure.
- Temperature setting range $25-90^{\circ}\text{C}$.
- Water circulation capacity 5-16L.
- Brushless DC motor for reliable working life circles.
- Unique clamp Structure for convenient cooking height adjusting.
- Colorful indication light.
- 1200W power for fast heating.

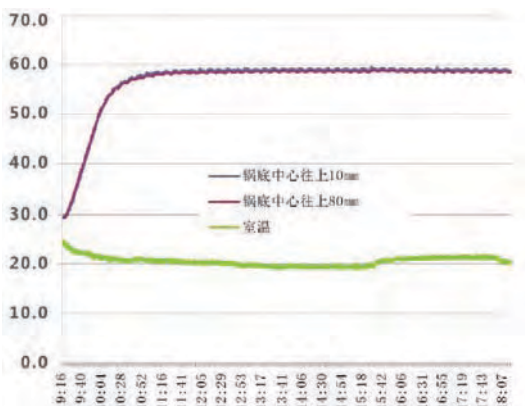

Sous Vide Cooking VS General Cooking



Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-SV02T	1200	5-20L	1.2	1.75	1	1.9	195X125X410	205X135X430	2368	4752	5676	CE/CB/ETL
LS-SV02T-W	1200	5-20L	1.2	1.75	1	1.9	195X125X410	205X135X430	2368	4752	5676	CE/CB/ETL



LS-SV02Q

- IPX7 waterproof.
- White LED display.
- Temperature and timer display.
- Sensor touch control.
- Temperature reaching alarm.
- Temperature precision tolerance $\pm 0.2^{\circ}\text{C}$.
- Reliable fixing structure.
- Temperature setting range 25-90°C.
- Water circulation capacity 5-16L.
- Brushless DC motor for reliable working life circles.



Sous Vide Cooker



LS-SV02R

- IPX7 waterproof.
- Color LED display.
- Temperature and timer display.
- Sensor touch control.
- Temperature reaching alarm.
- Temperature precision tolerance $\pm 0.2^{\circ}\text{C}$.
- Temperature setting range 25-90°C.
- Water circulation capacity 5-16L.
- Brushless DC motor for reliable working life circles.
- Easy use clamp structure.



Sous Vide Cooker



LS-SV02S

- IPX7 waterproof.
- White LED display.
- Temperature and timer display.
- Sensor touch control.
- Temperature reaching alarm.
- Temperature precision tolerance $\pm 0.2^{\circ}\text{C}$.
- Reliable fixing structure.
- Temperature setting range 25-90°C.
- Water circulation capacity 5-16L.
- Brushless DC motor for reliable working life circles.



Sous Vide Cooker

Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-SV02Q	800/1000	5-16L	1.02	1.26	4	5.46	170X110X350	355X235X405	3216	6612	8044	CE/CB/ETL
LS-SV02R	800/1000	5-16L	0.88	1.05	4	5.00	165X115X365	382X242X390	3240	6480	7560	CE/CB/ETL
LS-SV02S	800/1000	5-16L	0.92	1.10	2	2.60	170X110X400	355X235X425	3100	6270	7128	CE/CB/ETL

ENJOY +

Mini Sous Vide



LS-SV02J

- White LED display.
- Sensor touch control.
- Temperature precision within $\pm 0.2^{\circ}\text{C}$.
- Temperature setting range between $40\text{-}90^{\circ}\text{C}$.
- MAX water circulation capacity 5-16L.
- Brushless DC motor for reliable working life circles.
- Water shortage protection.



Sous Vide Cooker

Mini Sous Vide



LS-SV02K

- White LED display.
- Sensor touch control.
- Temperature precision within $\pm 0.2^{\circ}\text{C}$.
- Temperature setting range between $40\text{-}90^{\circ}\text{C}$.
- MAX water circulation capacity 5-16L.
- Brushless DC motor for reliable working life circles.
- Water shortage protection.



Sous Vide Cooker

Mini Sous Vide



LS-SV02L-1

- White LED display.
- Sensor touch control.
- Temperature precision within $\pm 0.2^{\circ}\text{C}$.
- Temperature setting range between $40\text{-}90^{\circ}\text{C}$.
- MAX water circulation capacity 5-16L.
- Brushless DC motor for reliable working life circles.
- Water shortage protection.



Sous Vide Cooker

Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-SV02J	800	5-16L	0.84	1.15	1	1.2	170X110X380	185X125X405	3024	6048	7056	ETL
LS-SV02K	800/1000	5-16L	0.83	1.12	1	1.2	170X110X380	185X125X405	3024	6048	7056	ETL
LS-SV02L-1	800/1000	5-16L	0.84	1.15	1	1.2	170X110X380	185X125X405	3024	6048	7056	ETL

LS-SV03A



- LED display in white.
- Patent magnetic driven water circulation system.
- Touch control buttons.
- Adjustable time and temperature.
- Degree Celsius and Fahrenheit for choice.
- Large transparent glass window.
- Immersed sensor for precisely temperature control within $\pm 0.2^{\circ}\text{C}$.
- Brushed stainless steel housing.
- Professional stainless steel Sous Vide Rack.



Sous Vide Cooker

LS-SV03D



- LED display in white.
- Patent magnetic driven water circulation system.
- Stainless steel inner pot (SUS304).
- Sensor touch control buttons.
- Adjustable Time and temperature display.
- Degree Celsius and Fahrenheit for choice.
- Brushed stainless steel housing.
- Immersed sensor for precisely temperature control within $\pm 0.2^{\circ}\text{C}$.
- 6 kinds of favorite settings for memory time and temperature.
- “PREHEAT” & “READY” lights show the cooking state.



Sous Vide Cooker

LS-SV01A



- LCD display in blue.
- Adjustable Time and temperature.
- Degree Celsius and Fahrenheit for choice.
- Large transparent tempered glass window.
- Temperature precision in $\pm 0.5^{\circ}\text{C}$.
- Stainless steel housing.
- With Sous Vide rack.



Sous Vide Cooker

Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-SV03A	700	10Qt	4.0	4.9	1	5.6	415X335X280	430X350X305	620	1255	1506	CE/CB/ETL
LS-SV03D	700	10Qt	4.0	4.9	1	5.6	415X335X280	430X350X305	620	1255	1506	CE/CB/ETL
LS-SV01A	520	9Qt	3.3	4.0	1	4.5	450X330X230	465X345X255	710	1413	1610	CE/CB/ETL

Coffee Machine

LS-KF01B-1/2/3

- Portafilter size: 58mm.
- Double boiler design, fast brewing and instant steam for milk frothing at the same time without waiting. (Version 2 is for double boiler)
- LED with colorful display, sensor touch control.
- Digit display to show brewing pressure, brewing temperature range adjustable between 90-98°C .
- Grinding system with adjustable grinding setting 0-30 level.
- Hot brew and cold brew function, default for 6 coffee menu.
- Brewing process with pre-infusion, helps all flavor are drawn out perfectly, Max 20-Bar pressure.
- Independent steam and hot water function, create massive and dry steam instantly.
- Cleaning function for pipeline cleaning and steady for brewing taste.
- Equipped with a flow meter design, ensuring more accurate cup volume for each extraction.
- Safety protection: water shortage remind & protection, bean shortage or no bean remind, error remind, cleaning scale remind, overpressure remind, overheating remind.

Note: Appendix version 1 is for single boiler with single pump, Appendix version 2 is for double boiler with single pump, Appendix version 3 is double boiler with double pump. Coffee Boiler: 1300W, steam boiler: 1300W.



Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-KF01B	1650	-	10.5	13.0	1	13.5	420X370X480	435X385X500	330	690	864	CE/CB/ETL

ENJOY +



Coffee Machine

LS-KF01A-1/2/3

- Portafilter size: 58mm.
- Double boiler design, fast brewing and instant steam for milk frothing at the same time without waiting.(Version 2 is for double boiler)
- LED display, buttons and easy knob control .
- Grinding system with adjustable grinding setting 0-30 level.
- Digit display to show brewing pressure, brewing temperature range adjustable between 90-98°C.
- Hot brew and cold brew function, default for 6 coffee menu.
- Brewing process with pre-infusion, helps all flavor are drawn out perfectly, Max 20-Bar pre.
- Independent steam and hot water function, create massive and dry steam inst.
- Cleaning function for pipeline cleaning and steady for brewing taste.
- Equipped with a flow meter design, ensuring more accurate cup volume for each extraction.



Coffee Machine

LS-KF01C-1/2

- Portafilter size: 58mm.
- Double boiler design, fast brewing and instant steam for milk frothing at the same time without waiting.(Version 2 is for double boiler)
- Mechanical pressure clock, buttons and easy knob control.
- Default functions for Espresso, Espresso x2 and Coffee function.
- Grinding system with adjustable grinding setting 0-30 level.
- Brewing process with pre-infusion, helps all flavor are drawn out perfectly, Max 20-Bar pressure.
- Independent steam and hot water function, create massive and dry steam instantly
- Cleaning function for pipeline cleaning and steady for brewing taste.
- Equipped with a flow meter design, ensuring more accurate cup volume for each extraction.
- Safety protection: water shortage remind & protection, bean shortage or no bean remind.



Coffee Machine

LS-KF01D-1/2

- Portafilter size: 58mm.
- Double boiler design, fast brewing and instant steam for milk frothing at the same time without waiting.(Version 2 is for double boiler)
- Full stainless steel body with color sensor touch button plus LED display.
- Mechanical pressure clock, brewing temperature range adjustable between 90-98°C.
- Default functions for Espresso, Espresso x2, Coffee and American Coffee function.
- Grinding system with adjustable grinding setting 0-30 level.
- Brewing process with pre-infusion, helps all flavor are drawn out perfectly, Max 20-Bar pressure.
- Independent steam and hot water function, create massive and dry steam instantly .
- Cleaning function for pipeline cleaning and steady for brewing taste.
- Equipped with a flow meter design, ensuring more accurate cup volume for each extraction.
- Safety protection: water shortage remind & protection, bean shortage or no bean remind.

Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-KF01A	1500		9.8	13.0	1	13.3	420X370X480	435X385X500	330	690	864	CE/CB/ETL
LS-KF01C	1500		9.8	13.0	1	13.3	420X370X480	435X385X500	330	690	864	CE/CB/ETL
LS-KF01D	1500		9.8	13.0	1	13.3	420X370X480	435X385X500	330	690	864	CE/CB/ETL



LS-KF02A-1

- 51mm portafilter size.
- Full stainless steel body with illumination touch button.
- Thermal block heating with aluminum steam tube.
- Water tank size: 1.2L.
- 15 Bar brewing pressure with pre-infusion function, water temperature 90°C.
- Default functions with Espresso, Espresso x 2, steam and hot water function.
- Over heating and dry boil protection.
- Capsule portafilter available .

Coffee Machine



LS-KF02B-1

- 51mm portafilter size.
- Full stainless steel body with illumination touch button plus pressure clock.
- Thermal block heating with stainless steel steam tube.
- Water tank size: 1.2L.
- 15 Bar brewing pressure with pre-infusion function, water temperature 90°C.
- Default functions with Espresso, Espresso x 2, steam and hot water function.
- Over heating and dry boil protection.
- Capsule portafilter available.

Coffee Machine



LS-KF02C-1

- 51mm portafilter size.
- Full stainless steel body with color sensor touch button plus LED display.
- Thermal block heating with stainless steel steam tube.
- Water tank size: 1.2L.
- 15 Bar brewing pressure with pre-infusion function, water temperature adjustable between 88-92°C.
- Default functions with Espresso, Coffee, Latte, Cappuccino, steam, hot water and auto milk frothing function .
- Over heating and dry boil protection.
- Capsule portafilter available.

Coffee Machine

Model	Power	Capacity	N.W. (kg)	G.W. (kg)	Packs	Carton G.W. (kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40'HQ (pcs)	Certifications
LS-KF02A-1	1350		3.7	5.2	1	5.4	384X193X408	358X203X418	960	1987	2246	CE/CB/ETL
LS-KF02B-1	1350		3.7	5.2	1	5.4	384X193X408	358X203X418	960	1987	2246	CE/CB/ETL
LS-KF02C-1	1350		4.2	5.7	1	5.9	384X193X408	358X203X418	960	1987	2246	CE/CB/ETL



Coffee Machine

LS-KF02D-1

- 51mm portafilter size.
- Full stainless steel body with color sensor touch button plus LED display.
- Thermal block heating with stainless steel steam tube.
- Water tank size: 1.2L.
- 15 Bar brewing pressure with pre-infusion function, water temperature 90°C.
- Default functions with Espresso, Espresso x 2, Coffee, steam and hot water functio.
- Over heating and dry boil protection.
- Capsule portafilter available.



Coffee Machine

LS-KF02E-1

- 51mm portafilter size.
- Full stainless steel body with color sensor touch button plus LED display.
- Water tank size: 1.2L.
- 15 Bar brewing pressure with pre-infusion function, water temperature 90°C.
- Default functions with Espresso, Coffee, Latte, Cappuccino, steam, hot water and auto milk frothing functio.
- Over heating and dry boil protection.
- Capsule portafilter available.



Coffee Grinder

LS-MD01A

- Grinding power 150W, Cone grinding knife .
- White LED display. Grinding system with adjustable time and grinding setting from 0-30 level .
- Funnel powder receiving bracket and storage collection method both switching available.

Model	Power	Capacity	N.W.(kg)	G.W.(kg)	Packs	Carton G.W.(kg)	Gift box size(mm)	Carton box size(mm)	20' (pcs)	40' (pcs)	40' HQ(pcs)	Certifications
LS-KF02D-1	1350		3.7	5.2	1	5.4	384X193X408	358X203X418	960	1987	2246	CE/CB/ETL
LS-KF02E-1	1350		3.7	5.2	1	5.4	384X193X408	358X203X418	960	1987	2246	CE/CB/ETL
LS-MD01A	200		2.2	3.4	1	4.0	140X210X305	220X290X385	880	1762	2156	CE/CB/ETL